## City of Brentwood

# **Urban Forest Guidelines**



### UPDATED 2020

A Document to Specify Street Tree Species, Planting Locations, and Future Maintenance

Prepared by:
City of Brentwood
150 City Park Way
Brentwood, CA 94513



**Urban Forest Guidelines** 

### INTRODUCTION

The City of Brentwood has developed these Urban Forest Guidelines to assist Landscape Architects, City Planners, and designers to specify the types of trees to be planted in order to create a more beautiful and unified City. Homeowners can also benefit as they will be able to use these guidelines as a reference to make informed choices when planting trees along street frontages, front yards and backyards.

Trees add scale and comfort to streets and their colors, shapes, and textures enhance the atmosphere and the identity of the City. The City's trees can be thought of as an "urban forest", and can be a diverse mixture of tree species. There are many growth characteristics and tree forms in street trees, and attention needs to be made to the trees you choose for your project. Street trees will grow for many years, and they must be properly placed and intelligently managed to maximize effects and minimize problems.

### HOW TO USE THIS DOCUMENT

- Completely review the information in this document prior to deciding on street trees.
- Review and use the "Maintaining Street Trees" section in Appendix D for your planting and
- Look over the "Street Tree List" spreadsheet in Appendix B and F to find a street tree that correlates
  with your street type and size of planting space. Note that other trees may be allowed, but it is up to the
  discretion of the Parks and Recreation Department. Check the characteristics listed on the top of the
  "Street Tree List" spreadsheet, and decide what criteria is important to you and could work well with
  your site.
- Look through the "Street Tree Photographs" in Appendix B and Tree Listings Appendix F to
  determine your favorite trees based on the aesthetics of the tree and the spreadsheet characteristics. For
  additional information and photos of the trees, go to http://www.caufc.org/
  documents/IFGU%20FactSheet\_Homeowner\_.pdf. These websites contain a lot of useful
  information on many trees and shrubs.

### HOW TO PLAN FOR STREET TREE PLANTING

- Determine the type of street your property is located on (such as arterial or collector). See Appendix
  A for plans and sections of the different streets in Brentwood, and ask the Community Development
  Department if you are unsure.
- Find the correlating street development layout plans from the engineering Department and design your project accordingly.
- Review the Landscaping and Plant Materials sections from the City of Brentwood's Plan Check Guidelines for additional information.
- Do a site analysis of your property locate the direction of the wind and sun, the slopes and
  depressions and view into and off the site. Also check for existing vegetation and any special
  considerations, such as utilities or signage.
- Prepare a preliminary street tree planting plan with a couple possible tree selections showing tree placement and spacing variations.
- Finalize your plans and tree choices, and review them with the City's Parks and Recreation Department.
- Prepare a preliminary maintenance and watering plan, and review it with the City's Parks and Recreation Department.

### STREET TREE CHARACTERISTICS AND CRITERIA

### 1. Street Tree Species and Spacing

### Multiple Species

Mixed species result in better long-term management because they are less prone to diseases and insects than single species would be, and not all the trees will be lost if a disease or infestation should occur. The cohesive street plantings will help to harmonize the neighborhood and create visual unity. For each block on a street, no more than three species are recommended.

Many street tree combinations are possible, a few examples are:

- Large shade trees mixed with flowering trees to create accents
- Evergreen trees mixed with deciduous trees to vary seasonal shade
- Different sizes or shapes of trees to mix up the silhouette of the street
- Fast and slow growing trees to create a variety of growth and losses
- Species with varieties of leaf colors and textures to generate visual interest

### Single Species

If a street already has many different tree species, a single type of tree is recommended to unify the diverse plantings. Should a single species be selected, it should be a large or medium size tree to provide a strong, unifying effect.


Attempt to match the most prevalent or most impressive existing tree species. Try to mimic the color and/or form of existing surrounding trees and repeat it throughout your project.



### Planting Patterns


The tree species can be placed in various patterns, and below are examples of three typical situations - Regular, Irregular and Accent Spacing. See the Placement of Street Trees section on page 7 for information on street tree spacing.

**Regular Pattern** - Repetitive pattern and spacing in tree locations. An example would be a formal and predetermined pattern of trees.




Typically use with monolithic or detached street spacing.

**Irregular Pattern** - Random spacing with no regular pattern. An example would be a natural and sporadic placement of a few types of trees. Species should still be limited to three selections in order to keep a uniform appearance.



Usually used with meandering street spacing.

**Accent Pattern** - Placing accent trees in specific locations. An example would be placing flowering trees at intersections or entries.



Generally use with any street spacing where accent is desired.

### 2. Street Tree Sizes

Selection of tree height and width is dependent on the type of street the project is located on. The main factors that determine the tree species on each street type are the growth rate, planting area constraints, and maintenance concerns.




Illustration of approximate growth rate for a typical tree. In general, tree roots grow as large as the canopy.

Fast growing species can quickly improve the visual effect, but they tend to be short-lived and will need to be replaced sooner. Slower growing species take longer to get the ultimate desired height, but they are much longer lived. It is recommended to combine both types of growth rates, and place the faster growing trees where the height is most needed. If you want quick coverage, consider the use of tall growing shrubs which can be cut back as the trees mature.

Existing trees should be protected and preserved if possible, and designated heritage trees may not be removed without prior City approval. Heritage trees are established trees with a historical significance, and/or exceptional horticultural interest.



Do not plant too close to powerlines. Trees could eventually grow into them.

The mixture of existing and new trees will balance the visual identity of the streets, and reduce the amount of trees to be removed in the future. The ideal street tree environment has a variety of tree species and growth rates that are repeated to give a sense of continuity and integrity to the City as a whole.


### Planting Area Constraints

Additional site conditions will vary per project, but some constraints might include slopes, utilities, and existing vegetation. Maintain appropriate clearance from existing and proposed light fixtures, signs, soundwalls, fences, vegetation, and above and underground utilities. Consider the ultimate height and width that a tree will grow, and make sure to have the necessary clearance.

Do not plant within a minimum of 5 feet of hardscaping or underground utilities, and check with the local utility departments for specifications about your particular project. Also, trees should be planted 50 feet from any traffic sign or street light.

When planting new trees, it should be noted that Brentwood soils are highly alkaline and tree varieties should be chosen that are compatible with this condition. See Street Tree List (Soils and Maintenance

Concerns notes) in Appendix B for more information. It is recommended that a soil sample testing be performed at all locations, and necessary soil amendment procedures should be followed.

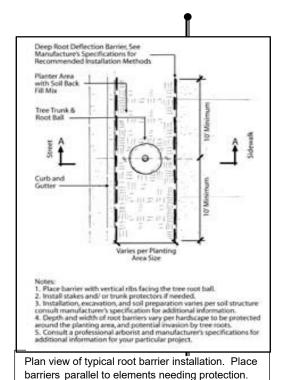

Planter Area 1/2"Minimum with Soil Back Above Grade Fill Mix Curb and Deep Root Deflection 24° Minimum Barrier, See Manufacturer's Specifications for ecommended stallation Meth 12"Minimum Excavate and Recompact Native Soil Varies per Area Size

Section View of typical root barrier placement

If planting areas are restricted, use an engineered soil as specified by the City of Brentwood. Engineered soils can be used to encourage deep root growth and minimize conflicts with hardscaping. See Appendix E (Structural Soil Specifications) for additional information.

In general, roots extend approximately as far as the canopy width. With time, a tree can outgrow a space that is too small, and cause severe root damage to sidewalks and roadways. In areas located within 5 feet of hardscaping or underground utility lines, root deflection panels should be installed, deep rooting tree species should be used, and watering shall be applied to enhance deep rooting. Infrequent, deep watering is recommended to encourage deep rooting. Root barrier boxes and round barriers are not approved.

### Maintenance Concerns

All street trees require maintenance and care, some more than others. Many trees produce leaf, flower and fruit drop; and most trees have periodic limb breakage. Con- sider the type of maintenance your street trees will be given when choosing the tree species. Place high maintenance trees in areas where they will be accessible, and ensure that high traffic areas are kept free of litter drop from the trees. See the "Maintaining Street Trees" section in Appendix D for additional information.



This sycamore tree has outgrown its planter and is damaging the sidewalk and curb.



Severely damaged sidewalks such as this can be hazardous to pedestrians and costly to repair.

### 3. Street Tree Shape and Form

There are a variety of tree shapes, and the use of the desired forms can create different effects. When choosing a tree species consider the type of canopy shape and the street character you would like to create.



### **Tunnel Effect**

A canopy of trees over a street can make a street feel more rural in character and human in scale. A tunnel effect can be very attractive and helps to unify a street. Canopies also create an informal atmosphere and a continuous pattern of shade on the street. A variety of tree shapes and species combinations helps to create the tunnel effect.

### Corridor Effect

Tall, narrow trees planted in a row can create a corridor effect on a street. The corridor effect leads the eye and creates a very formal feeling to the neighborhood. The corridor effect does not usually cast as much shade on the street as the canopy effect species.

### Low Branching Effect

Trees that are weeping and pyramidal in form tend to have low branches that could be a nuisance to pedestrians, bikes and cars. These trees can be beneficial in locations where low screening is desired. Combining shrubs underneath the street trees can also create a low branching effect and add to the screening.



**Tunnel Effect** 



Corridor Effect




Low Branching Effect

### 4. Placement of Street Trees

### Monolithic Street Spacing

This type of spacing involves trees that are planted immediately adjacent to a sidewalk or bikeway in a regular pattern, and are the main identity of the street. These are generally medium to large trees, and this spacing can be used to provide a corridor or tunnel effect.



Monolithic Street Spacing can be used to create a corridor or tunnel effect.


This type of spacing occurs on the following streets:

- Industrial
- Medians
- Residential Collector
- Residential Local



### **Detached Street Spacing**

This spacing occurs when trees are planted between a sidewalk and the roadway or bikeway, and typically has a variety of patterns. This type of spacing is a useful method of separating the pedestrians from traffic areas. The trees for this size tend to be medium to large, and spreading in size in order to provide shade for both the sidewalk and the street area. This type of spacing is encouraged when conditions provide enough space, but the streets it occurs on are:




Detached Street Spacing is an effective way to removing pedestrians from traffic areas.

- Arterial
- Collector
- Commercial
- Residential Collector
- Residential Local



### Meandering Street Spacing

This type of spacing usually involves a curvilinear walkway and ample planting area, and is generally used between a sidewalk and the street. This spacing can be used with any size tree, and looks more natural with a variety of sizes. The spacing is used with an irregular or accent patter and is typically triangulated and clustered in drifts, and tends to look like the trees are naturally occurring. This type of spacing is recommended in other areas if site conditions allow, but the streets it occurs on are:



Meandering Street Spacing can give a street a natural look

- Arterial
- Collector
- Industrial
- Residential Collector
- Residential Local
- Medians
- Cul-de-sac



Meandering Street Spacing



This Pistacia chinensis (Chinese Pistache) provides beautiful foilage in the fall and winter.

### 5. Foliage and Flowers

### Seasonal Change

Evergreen trees provide year round screening and foliage. Deciduous trees lose their leaves in the winter, but provide fall color and interesting branching patterns. Leaf drop can become a problem in areas where maintenance will be minimal, and in these instances an evergreen would be a more appropriate selection.

Energy conservation can be affected by the type of tree selected. Proper placement of an evergreen tree can keep a building cool in the summer. A deciduous tree would do the same job in the summer, but also let the sun in and help to heat a building in the winter. Consider the ultimate height of a street tree, and the length of the shadows it will cast in its stages of growth.




Lagerstromeria indica (Crape Myrtle) flowers add color and accent to this street.

### Accent Trees

Flowering trees can be very useful for accent plantings, such as at entries and corners. It is recommended to combine accent or flowering trees with larger evergreen trees. The evergreen species can provide a strong background against the flowering branches of a deciduous tree. Accents can also be created by the use of combining or contrasting leaf textures and colors.

# APPENDIX A:

Plans and Sections for Street Types

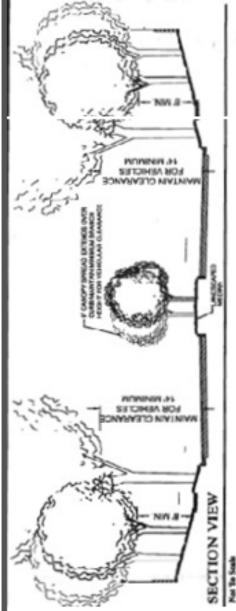

Arterial Street Tree Characteristi

Energeten ar Decisious - Elther, See Accent Planting Below Ministerans Concerns - Fruit and Leaf Drop, Invasive Root Where Hartiscape Exists - May Need Dwep Root Barriers. Deep Watering, and Regular Raiding and Sweeping Accent Planting - Flowers, Fauls & Bernes, and Fall Color Printer Unage - Mederale la Regular Drowth Fare - Moderate to Fast The Size - Nedkumio Larye

Sorgesing - If Underlands View Skist. Spacing - Meandaring Naturalize in Ortuga, Custer in Drifts furcings Circens - Bha Lare and Telfic Areas . Fire Hydrani (T' Minis

Canapy Shape - Arry

Street Elgin (Misronidar) Comments - Conciliens Didute Perding Locations, and Specing Beand on Tree Selection

Median Street Tree Characteristics

NOTE: ALL PUNTNO AREAS THAT ARE LESS THAN 10\*MOR REQUIRE ROOT DEFLECTION BANNISHS, SEE PAGE 5 OF THIS COCUMENT FOR MORE INFORMATION.

Slow to Moderate

ms - Fruit and Loaf Decp, Investine Rods

www., Fruits & Services and Fall Color ing, and Regular Paiding and Sweeping

> **ENHANCECAPING** STREET INSECST

DESTANCE TO ALL UTILITIES

daring in Groupe, More Foemal Inan Adahla 11 - Taffc Aves (Wriman 14) strie Years Exist

13

¥ STATE.

PLAN VIEW

ARTERIAL STREET TREE PLANTING

PLANA

ARTERIAL

# Where Hardscape Exists - May Need Doop Foot Serriers (Minimum 14"), Sidewalk (if Minimum), Street Lights Harcocke Concerns - Bibe Lans and Traffic Areas CHARLES MANUAL MINIMARKANDS CANCEY BPIEND EXTENDS OVER MUTAIN CLEANA FOR VEHICLES 14' MINIMUM CANDRON-CONTROL MACCON NOTE: ALL PLANTING APPLAS THAT APELESS THAN 12" NIDE REQUIRE ROOT DEFLICTION INABBIERS, SEE PAGE 5 OF THIS DOCUMENT FOR MORE INFORMATION. SECTION VIEW Net To Seale

Collector Street Tree Characteristics

Growth Faits - Stow to Fast

Maintenance Concerns - Fruit and Ledf Drup, Invasive Root Evergmen or Dackkoous - Ether, See Accent Plenting Beton Weter Usage - Low to Moderata

Specing - Meandeding, Naturalize in Groups, Challer in Drifts Deep Wishing, and Regular Raking and Sweeping. Aucent Planding - Rowers, Fruts & Berries and Fall Color Screening - If Undeshable Veres Exist Canopy Shape - Arry

(Minimum 50'), Frei Hyddart (5' Mainum) Street Signs (minimum SZ?) Median Street Tree Characterlatics

Tree Size - Small to Medium Growth Rain - Slow to Mod

DUTHINATE WIDTH

3'MIN

DISTANCE TO S' MINMUM

Evergeen or Decisious - Ether.

Where Harbosco Exists - May Need Dwo Root Berrien Deep Watering, and Regular Raking and Sweeping

Accent Planting - Flowers, Fruits & Berries and Fell Colo Sorweeling - If Undestrable Views Exter. Carsopy Shape - Any

NMY

TRANSI UME

TRAVEL LANE

SEE STREET TREE LST

NO THEE TRUNK VA PER TREE SIZE -

MINIMUM DISTAN


Spacing - Meandering in Groups, More Formal than Arterial Commerts - Conditions Dictate Planting Lecations, and Hardasapa Canosms - Traffic Arress (Minimum 147) Spacing Based on Tree Selection

# PLAN VIEW

Not To Scale

# COLLECTOR STREET TREE PLANTING

NOTE: ALL PLANTING AREAS THAT ARE LESS THAN 10 WIDE REQUIRE ROCT DEFLECTION BARRESISS SET PAGE 5 OF THIS DOCUMENT FOR MORE INFORMATION.



CONCENTRATION CENTRAL CAPITY OF SHIPLES OF S

Commercial Street Tree Characteristics

The Star - Small to Madum Green Rate - Moderate to Fast Evergreen or Dodicuscus - Ethau, See Accent Planting Belon Water Usage - Low to Acque Maniferance Concars - Full and Leaf Drop, Innestre Rode Maniferance Concars - Full and Leaf Drop, Innestre Rode

Maintanancia Concarra - Full and Leaf Drop, lineasive Rodal When Naticeage Exists - May lead Osep Root Benten, Deep Walaning and Rappine Relingand Senepting Acoust Pauling - Foreira, Finite & Berriera, and Fall Color Cassoy Shape - Met Speneding or Pyramidal, Unions Roos Screening - If Undestrates Ween Exist Species - Cardional, Foreir Book Casses Operating for Signs and Entitle Kastes Concerns - Persion Leve and Cardiolans, but Kastes Concerns - Persion Leve and Turke Acoust

Nandacajo Concerna - Parting Larre and Traffic Ansas (Minimum SC), Sidewalk (F Walenum), Sheet Lights (Minimum SC), Fre Hydratel (S Mericum), Sheet Signa (Minimum SC) Comments - Conditions Oktake Pareling Locations, and Spacing Based on Tree Salescion

PLAN VIEW

SECTION VIEW


Not To Scale

COMMERCIAL STREET TREE PLANTING

PLANC COMMERCIAL STREET

El Gabiel Samman Nathable Least A, Will S.

NOTE ALL PLANTING AREAS THAT ARE LESS THAN 10 WIDE RECURSE ROOT DEPLECTION BARRIERS, SEE PAGES OF THIS DOCUMENT FOR MORE INFORMATION.

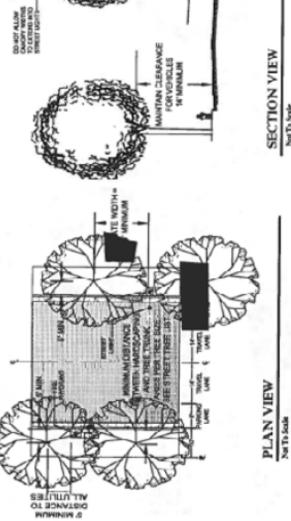


Industrial Street Tree Characteristics

Maintenance Concerns - Fruit and Last Drop, Invasive Fool

Hartiscape Concerns - Parking Lane and Traffic Areas (Melinum SV), Steed Lights (Melinum SV), The Hydratt (Melinum S), Steed Signs (Milenum SV) Convents - Condition Dictate Planting Locations, and Spacing Bread on The Selection Deep Wellering, and Regular Rading and Sweeping Accent Residing - Plowers, Fruhs & Berties and Fall Col Cercoys Shope - Any, Prefer Dense and Compact Case Screeking - If Undershipse Vene East May Need Shi Spacing - Monoditric or Meandering. Tight & Complain Mil. Letter Operangs for Stype and Entities.

SECTION VIEW

INDUSTRIAL STREET TREE PLANTING INDUSTRIAL

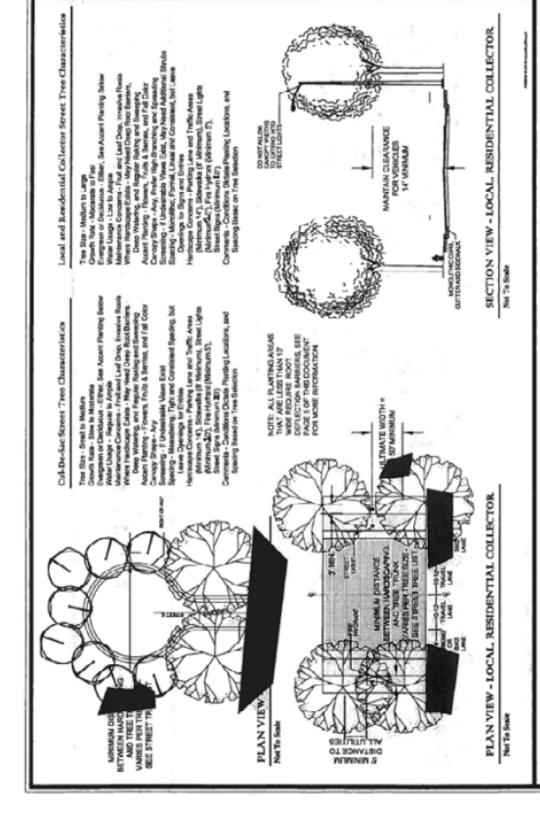

LOCAL, RESIDENTIAL COLLECTOR STIREET TIREE PLANTING

RESIDENTIAL COLLECTOR, AND CUL-DE-SAC LOCAL STREET,

PLANE

# APPENDIX B:

Street Tree List and Photographs (Residential and Commercial)

LEGEND FOR RESIDENTIAL AND COMMERCIAL TREE LIST						
Planter Strip	Can be planted anywhere					
Med-Irg	Plant in medium to large areas					
TREE SIZE	Sml: 30' or less	Med: 30' to 60'	Lrg: 60' or greater			
GROWTH RATE (per year)	Slow: 12" or less	Moderate: 13" to 24"	Fast: 25" or greater			

EXAMPLE OF SMALL TREE: Acer buergernaum/ Trident Maple EXAMPLE OF MED TREE: Acer rubrum/ Red Maple EXAMPLE OF LRG TREE: Cedrus atlantica/ Atlas Cedar









	RESIDENTIA	L and CC	MMEF	CIAL T	REE L	IST			
REF. NBR	BOTANICAL NAME COMMON NAME	LOCATION	TREE SIZE	GROWTH RATE	EVERGREEN	CANOPY SHAPE	FALL COLOR	FLOWERING	WATER
1	Acer buergeranum TRIDENT MAPLE	Sml	Sml	Fast	1	Round	Х	1	Mod
2	Acer palmatum JAPANESE MAPLE ornamental	Sml	Sml	Mod	1	Upright	-	ı	Mod
3	Acer rubrum RED MAPLE - AUTUMN BLAZE/OCTOBER GLORY	Sml	Med	Fast	-	Pyramidal	Х	-	Mod
4	Aesculus sapindaceae HORSECHESTNUT	Med- Irg	Med	Mod	ı	Round	-	ı	Mod
5	Arbutus 'Marina' HYBRID STRAWBERRY TREE	Sml	Sml	Slow	Х	Round	-	Х	Low
6	Betula nigra <i>RIVER BIRCH</i>	Med- Irg	Med	Fast	-	Upright	-	-	High
7	Calocedrus decurrens INCENSE CEDAR	Med- Irg	Lrg	Slow	Х	Pyramidal	-	-	Low
8	Cedrus atlantica ATLAS CEDAR	Med -Irg	Lrg	Slow	Х	Pyramidal	-	1	Low
9	Cedrus deodara DEODAR CEDAR	Med- Irg	Lrg	Slow	Χ	Pyramidal	-	ı	Low
10	Cercis canadensis EASTERN REDBUD	Sml	Sml	Slow	ı	Round	Χ	X	Low
11	Chionanthus retusus CHINESE FRINGE TREE	Sml	Sml	Mod	-	Round	-	Х	Mod
12	Cotinus coggygria SMOKE TREE	Sml	Sml	Slow	-	Round	Х	Х	Mod
13	Crataegus laevigata ENGLISH HAWTHORN	Med- Irg	Sml	Mod	-	Upright	-	Х	Mod
14	Ginkgo biloba-Maidenhair Tree FAIRMOUNT/AUTUMN GOLD	Sml	Sml	Slow	-	Pyramidal	Х	-	Mod
15	Koelreuteria paniculata GOLDENRAIN TREE	Sml	Med	Fast	-	Round	-	Х	Mod
16	Lagerstroemia indica CRAPE MYRTLE - NATCHEZ/CHEROKEE/ TUSCARORA/DYNAMITE	Sml	Sml	Mod	-	Round	Х	Х	Low
17	Magnolia grandiflora SOUTHERN MAGNOLIA	Med- Irg	Med	Slow	Х	Round	-	Х	Mod
18	Magnolia soulangiana SAUCER MAGNOLIA ornamentl	Sml	Sml	Mod	-	Round	-	Х	Mod
19	Malus floribunda CRABAPPLE	Sml	Sml	Fast	-	Round	-	Х	Mod
20	Olea europaea OLIVE - SWAN HILL ornamental	Sml	Sml	Mod	Х	Round	-	-	Low

<sup>\*</sup> Sml -- can be planted anywhere

<sup>\*</sup> Med-lrg – plant in medium to large areas

	RESIDE	NTIAL aı	nd COMN	IERCIA	L TREE	LIST			
REF. NBR	BOTANICAL NAME COMMON NAME	LOCATION	TREE SIZE	GROWTH RATE	EVERGREEN	CANOPY SHAPE	FALL COLOR	FLOWERING	WATER
21	Pinus thunbergiana JAPANESE BLACK PINE ornamental	Sml	Sml	Slow	X	Pyramidal	-	ı	Low
22	Pistacia chinensis CHINESE PISTACHE - KEITH DAVEY	Sml	Med	Slow	-	Round	Х	-	Mod
23	Platanus acerifolia LONDON PLANE TREE	Med- Irg	Lrg	Fast	-	Pyramidal to oval	X	X	Mod
24	Prunus cerasifera PURPLE LEAF PLUM - FRUITLESS	Sml	Sml	Fast	-	Upright	-	Х	Mod
25	Pyrus kawakamii EVERGREEN PEAR	Sml	Med	Fast	Semi	Round	Х	Х	Mod
26	Quercus agrifolia COAST LIVE OAK	Med- Irg	Lrg	Mod	Х	Round	-	Х	Mod
27	Quercus coccinea SCARLET OAK	Med- Irg	Med	Mod	-	Round	Х	-	Low
28	Quercus douglasii BLUE OAK	Med- Irg	Lrg	Slow	-	Round	-	-	Mod
29	Quercus ilex HOLLY OAK	Sml	Med	Mod	Х	Round	-	-	Low
30	Quercus lobata VALLEY OAK	Med- Irg	Lrg	Mod	-	Round	-	-	Mod
31	Quercus palustris PIN OAK	Med- Irg	Lrg	Mod	-	Pyramidal	Х	-	Low
32	Quercus rubra RED OAK	Med- Irg	Med	Mod	-	Upright	Х	-	Mod
33	Quercus shumardii SHUMARD RED OAK	Med- Irg	Lrg	Mod	-	Round	Х	-	Mod
34	Quercus suber CORK OAK	Med- Irg	Lrg	Mod	Х	Round	-	-	Mod
35	Quercus virginiana SOUTHERN LIVE OAK	Sml	Med	Mod	Х	Round	-	-	
36	Sapium sebiferum CHINESE TALLOW TREE	Sml	Med	Fast	-	Round	Х	-	Mod
37	Tilia cordata LITTLELEAF LINDEN	Sml	Med	Mod	-	Upright	-	-	High
38	Sequoia sempervirens 'Aptos Blue' APTOS BLUE REDWOOD	Med- Irg	Med	Fast	X	Pyramidal	-	-	Mod
39	Ulmus americana AMERICAN ELM - FRONTIER	Med- Irg	Med	Fast	-	Upright	Х	-	High
40	Ulmus parvifolia CHINESE ELM - DRAKE ELM	Sml	Med	Mod	-	Round	-	-	Mod
41	Zelkova serrata SAWTOOTHZELKOVA	Sml	Med	Mod	•	Upright	Х	-	Mod




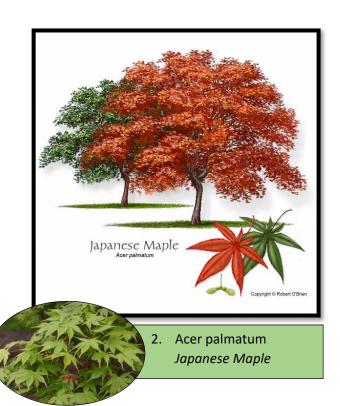



. Acer rubrum Red Maple – Autumn Blaze/October Glory




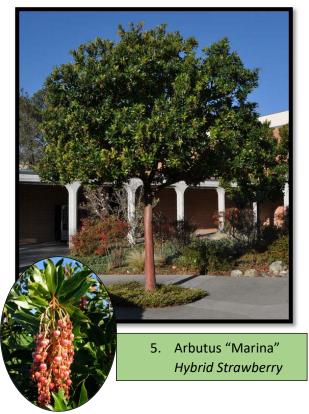








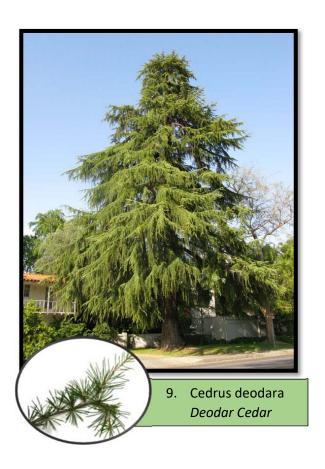



10. Cercis canadensis


Eastern Redbud





11. Chionanthus retusus *Chinese Fringe* 





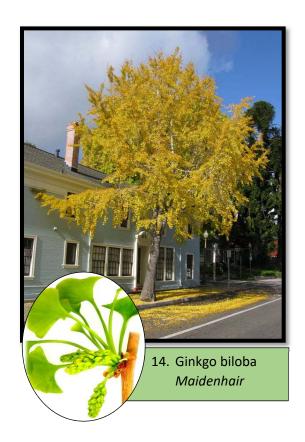


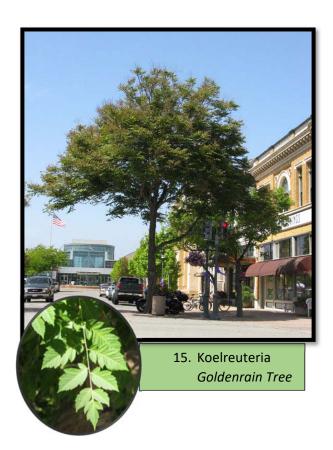

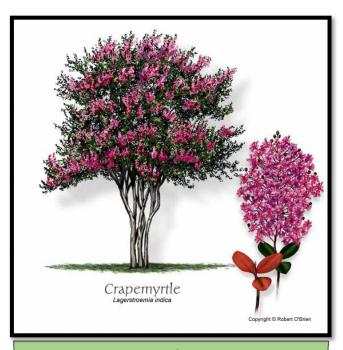


16. Lagerstroemia indica


Crape MyrtleNatchez/Cherokee/Tuscarora/Dynamite

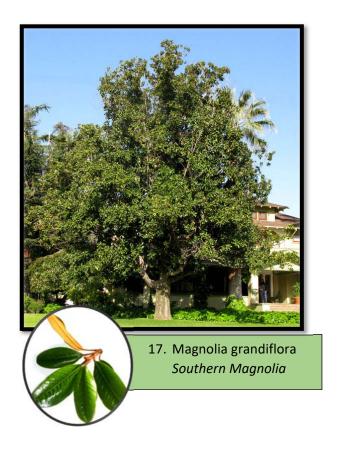




18. Magnolia soulangiana
Saucer Magnolia ornamental

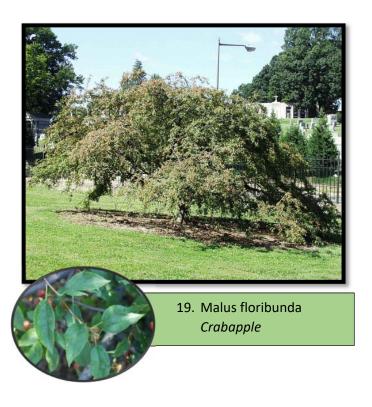

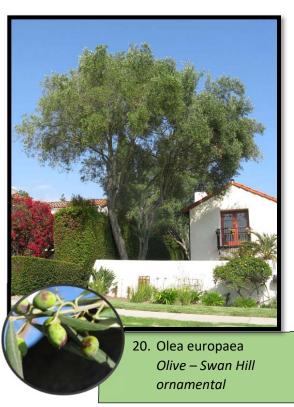

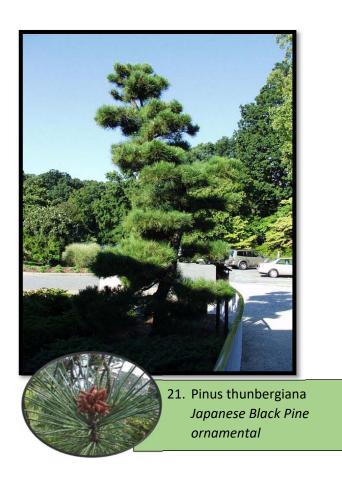






23. Platanus acerifolias *London Plane* 















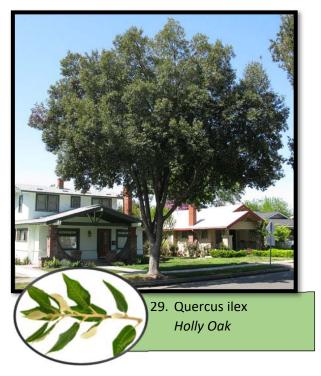

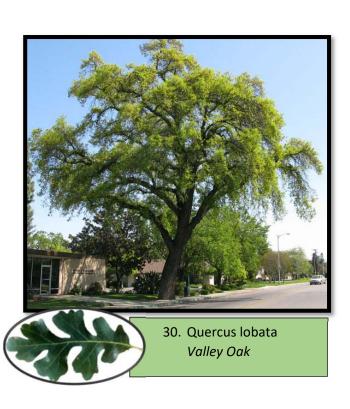











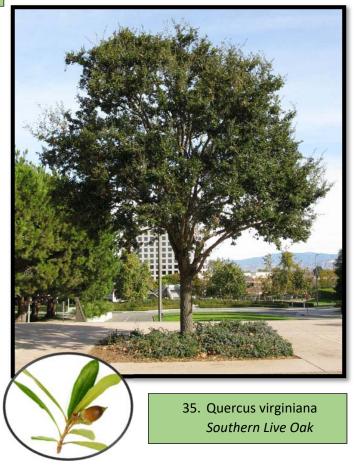

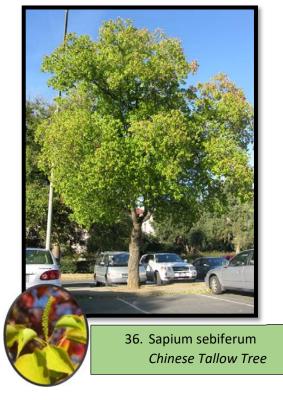








39. Ulmus americana *American Elm - Frontier* 

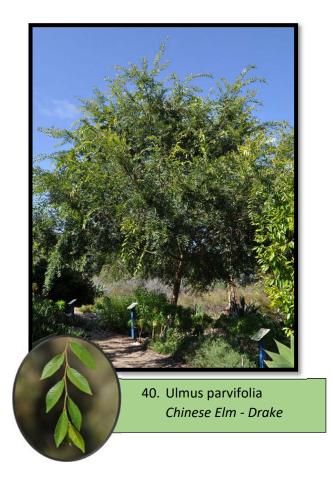



### **RESIDENTIAL and COMMERCIAL TREE LIST** NON POTABLE WATER FALL COLOR FLOWERING Planter Strip Only / Any SIZE EVERGREEN LOCATION GROWTH RATE TREE ( REF. **BOTANICAL NAME NBR COMMON NAME** Acer buergeranum Planter 1 Round Med Sml Fast No Yes No TRIDENT MAPLE Strip Planter Acer campestre 2 Mod Oval Yes Med Med No No HEDGE MAPLE Strip Med/ Cedrus deodara 3 Pyramidal Lrg Fast Yes No No Low DEODAR CEDAR Irg Cercis occidentalis 4 Yes Sml Fast No Upright No Low WESTERN REDBUD\* Sml Palo Verde Sml/ 5 Sml Mod No Round No Yes Low DESERT MUSEUM med Pinus pinea Med/ 6 Fast Yes Vase No Lrg No Low ITALIAN STONE PINE Irg 7 Plantanus racemosa Lrg Fast Spreading No Med-high No No Lrg CALIFORNIA SYCAMORE area Quercus agrifolia Med/ Mod/ 8 Yes Round No No Med Lrg COAST LIVE OAK\* Irg Fast Quercus virginiana Med/ Lrg Round 9 Mod/ No No Med SOUTHERŇ LIVE OAK Irg Fast Yes Planter Sophora japonica 10 Med Mod No Spreading No Med Yes JAPANESĖ PAGODA Strip

TREE SIZE

Sml: 30' or less

Med: 30' to 60'

Lrg: 60'

GROWTH RATE (per year)


Slow: 12" or less

Moderate: 13" to 24"

Fast: 25" or greater

PLANTER STRIP = low

<sup>\*</sup>Native California Species

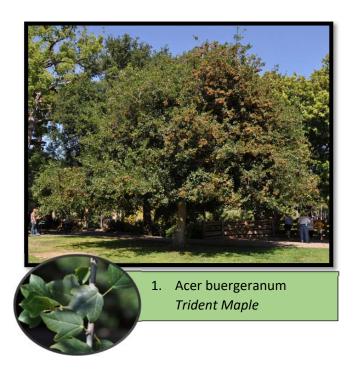







4. Cercis occidentalis Western Redbud













RESIDENTIAL and COMMERCIAL TREE LIST							
Botanical name	Acer buergeranum	Acer palmatum	Acer rubrum				
Common name	Trident Maple	Japanese maple	Red maple				
Plant Picture #	1	2	3				
Canopy/Shape	spreading with a low canopy	erect or spreading with a low canopy	columnar shape				
Evergreen/deciduous	deciduous	deciduous	deciduous				
Tree Size	H 20-25ft W 20-25ft	H 15-25ft W 15-25ft	H 50-60 ft W 15-25ft				
Growth Rate	36 inches per year	12 - 24 inches per year	36 inches per year				
Longevity	50 - 150 years	50 - 150 years	50 - 150 years				
Leaf characteristics	lobed and palmate, green, golden or yellow or orange	palmate, light to med green, bronze or purple, red or orange	lobed and palmate, red or purple or bronze				
Flowering	flowers inconspicuous, yellow, flowers in Spring	flowers inconspicuous, purple, flowers in Spring	flowers showy, red, flowers in Spring				
Fruits/Berries/Nuts	yellow or brown samara, fruiting in Summer	brown samara, fruiting in Summer	red samara, fruiting in Spring or Summer				
Bark	light green or light gray, exfoliating	green, light green, light gray or red brown, furrowed or smooth	light gray, scaly				
Exposure	full sun to partial shade	partial shade to full shade	full sun to partial shade				
Soil	moist soil	moist but well drained soil	wet to moist soil				
Maintenance Concerns	root damage potential rated as low	root damage potential rated as low	litter issue is dry fruit, root damage potential rated as moderate				
Comments	attracts birds	fire resistance is favorable, not deer palatable	fall color best in frosty areas				
Health Concerns	no known health hazards	ds allergy health hazard allergy health					

RESIDENTIAL and COMMERCIAL TREE LIST							
Botanical name	Aesculus sapindaceae	Arbutus "marina"	Betula nigra				
Common name	Horsechestnut	<b>Hybrid Strawberry Tree</b>	River birch				
Plant Picture #	4	5	6				
Canopy/Shape	erect or spreading and requires ample growing space	erect or spreading with a low canopy rounded, or vase shape	Erect or spreading, conical shape				
Evergreen/deciduous	deciduous	evergreen	deciduous				
Tree Size	H 50-80ft W 40-50ft	H 40-50ft W 40ft	H 50-90ft W40-60ft				
Growth Rate	24 - 36 inches per year	12 - 24 inches per year	36 inches per year				
Longevity	50 - 150 years	50 - 150 years	50 - 150 years				
Leaf characteristics	lobed and palmate, green, red or purple or bronze	elliptic, green no change, evergreen	ovate to rhomboidal, green, golden or yellow or orange				
Flowering	showy, red, flowers in Spring	showy, pink or rose, flowers in Fall, Winter, Spring or Summer	inconspicuous, flowers in Spring, Summer or Fall				
Fruits/Berries/Nuts	red samara, fruiting in Spring or Summer	prolific, red or yellow berry, fruiting in Fall or Winter	brown, beige or mostly green nut				
Bark	dark brown, exfoliating or scaly	red brown, exfoliating or smooth	striking , dark brown, red brown or pink, exfoliating or smooth				
Exposure	full sun to partial shade	full sun	full sun to full shade				
Soil	drought tolerant	moist to dry	wet to moist				
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as high	litter issue is wet fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as moderate				
Comments	fire resistance is favorable, has fragrant flower, attracts squirrels	wildlife uses fruit, attracts birds	attracts birds, deer palatable				

	RESIDENTIAL and COMMERCIAL TREE LIST			
Botanical name	Calocedrus decurrens	Cedrus atlantica	Cedrus deodara	
Common name	Incense cedar	Atlas cedar	Deodar cedar	
Plant Picture #	7	8	9	
Canopy/Shape	erect and requires ample growing space	Erect or spreading and requires ample growing space	spreading or weeping and requires ample growing space	
Evergreen/deciduous	evergreen	evergreen	evergreen	
Tree Size	H 70-90ft W 10-15ft	H 45-65ft W 35-50ft	H 40-60ft W20-30ft	
Growth Rate	12 - 24 inches per year	12 - 24 inches per year	36 inches per year	
Longevity	greater than 150 years	greater than 150 years	greater than 150 years	
Leaf characteristics	scalelike, green w/no change	needle, bluish green or silver or gray green	needle, bluish green or silver or gray green	
Flowering	flowers in Spring	flowers in Spring	flowers in fall	
Fruits/Berries/Nuts	brown or red cone, fruiting in Summer or Fall	brown cone, fruiting in Fall or Winter	brown cone, fruiting in Spring	
Bark	red brown, fibrous or furrowed	dark brown or dark gray, fissured	dark gray, fissured	
Exposure	full sun to partial shade	full sun to part shade	full sun to partial shade	
Soil	moist to dry, drought tolerant	moist to dry, drought tolerant	moist to dry, drought tolerant	
Maintenance Concerns	litter issue is dry fruit, root damage potential rated at moderate	litter issue is dry fruit, root damage potential rated at moderate	litter issue is dry fruit, root damage potential rated at moderate	
Comments	fire resistance is favorable, attracts squirrels	fire resistance is unfavorable	fire resistance is unfavorable	
Health Concerns	allergy and irritant hazard	no known health hazard	allergy health hazard	

	RESIDENTIAL and COM	MERCIAL TREE LIST	
Botanical name	Cercis canadensis	Chionanthus retusus	Cotinus coggygria
Common name	Eastern redbud	Chinese fringe tree	Smoke tree
Plant Picture #	10	11	12
Canopy/Shape	erect or spreading with a low canopy	rounded or spreading	compact and erect with a low canopy
Evergreen/deciduous	deciduous	deciduous	deciduous
Tree Size	H 25-35ft W 25-35ft	H 10-20ft W 6-12ft	H 10-15ft W 10-18ft
Growth Rate	24 inches per year	24 inches per year	24 inches per year
Longevity	40 - 150 years	40 - 150 years	40 - 150 years
Leaf characteristics	round, green, golden or yellow or orange	ovate, green golden or yellow or orange	oblong, bluish green or silver or gray greed, red or orange
Flowering	flowers showy white, flowers in Spring	flowers showy, fragrant white, flowers in Summer	flowers showy, lavender or purple, flowers in spring
Fruits/Berries/Nuts	brown, purple or mostly green legume, fruiting in Spring	purple or mostly blue drupe, fruiting in Fall or Winter	pink drupe, fruiting in Summer
Bark	black, dark brown or red brown, scaly	dark brown, dark gray, light gray or light green, furrowed, ridged or striated	dark brown, exfoliating
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist	moist	moist to dry
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is wet fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as low
Comments	attracts birds	attracts birds	not deer palatable
Health Concerns	allergy health hazard	allergy health hazard	allergy and irritant health hazard

	RESIDENTIAL and COM	MERCIAL TREE LIST	
Botanical name	Crataegus laevigata	Ginkgo biloba	Koelreuteria paniculata
Common name	English hawthorn	Maidenhair tree	Goldenrain tree
Plant Picture #	13	14	15
Canopy/Shape	low canopy	erect or spreading, requires ample growing space	spreading with a low canopy
Evergreen/deciduous	deciduous	deciduous	deciduous
Tree Size	H 25ft W 25ft	H 35-65ft W25ft	H 20-35ft W 25-40ft
Growth Rate	24 inches per year	12 - 24 inches per year	12 - 24 inches per year
Longevity	50 - 150 years	greater than 150 years	50 - 150 years
Leaf characteristics	ovate to shallowly lobed, green red or orange	rhomboidal, green, golden or yellow or orange	pinnately compound odd, green, golden or yellow or orange
Flowering	flowers showy, white or pink, flowers in Spring	flowers in Spring	flowers showy, yellow, flowers in Summer
Fruits/Berries/Nuts	prolific, red pome, fruiting in Summer or Fall	orange or yellow drupe, fruiting in Fall	prolific, brown or yellow capsule
Bark	dark brown or light green, scaly	light green, fissured	dark brown or light green, fissured
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist to dry	moist to dry	moist to dry, drought tolerant
Maintenance Concerns	litter issue is wet fruit, root damage potential rated as low	root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as low
Comments	attracts birds and bees	has unpleasant fruit fragrance, attracts squirrels	drought and smog tolerant
Health Concerns	tree has thorny branches, no known health hazard	allergy and irritant health hazard	allergy health hazard

	RESIDENTIAL and COMMERCIAL TREE LIST			
Botanical name	Lagerstroemia indica	Magnolia grandiflora	Magnolia soulangiana	
Common name	Crape myrtle	Southern magnolia	Saucer Magnolia	
Plant Picture #	16	17	18	
Canopy/Shape	erect or spreading with a low canopy	erect or spreading and requires ample growing space	erect or spreading with a low canopy	
Evergreen/deciduous	deciduous	evergreen	deciduous	
Tree Size	H 25ft W 25ft	H 60-80ft W50-60ft	H 25ft W 25ft	
Growth Rate	24 inches per year	24 inches per year	24 inches per year	
Longevity	50 to 150 years	greater than 150 years	50 - 150 years	
Leaf characteristics	oval, bronze or purple or reddish, red or orange	elliptic to broadly ovate, dark green	obovate, green, golden or yellow or orange	
Flowering	flowers showy, lavender, pink, red, rose or white, flowers in Summer	flowers showy, fragrant white, flowers in Spring, Summer or Fall	flowers showy, fragrant pink, purple or white, flowers in Spring or Winter	
Fruits/Berries/Nuts	brown capsule, fruiting in Fall	prolific, purple or red follicle, fruiting in Summer or Fall	rose follicle, fruiting in Summer	
Bark	striking, light green, pink or red brown, exfoliating or smooth	light green, fissured	light gray, smooth	
Exposure	full sun	full sun to partial shade	full sun to partial shade	
Soil	moist to dry, drought tolerant	moist	moist	
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is flowers, dry fruit and leaves	root damage potential rated as low	
Comments	attracts birds	has a fragrant flower, attracts birds	has fragrant flower	
Health Concerns	no known health hazard	allergy and irritant health hazard	allergy health hazard	

	RESIDENTIAL and CON	MERCIAL TREE LIST	
Botanical name	Malus floribunda	Olea europaea	Pinus thunbergii
Common name	Crabapple	Olive - swan hill	Japanese black pine
Plant Picture #	19	20	21
Canopy/Shape	erect or spreading with a low canopy	erect or spreading with a low canopy	erect or spreading and requires ample growing space
Evergreen/deciduous	deciduous	evergreen	evergreen
Tree Size	H 12-25ft W 18-30ft	H 25-30ft W 25-30ft	H 25-30ft W20-35ft
Growth Rate	24 inches per year	24 inches per year	24 to 36 inches per year
Longevity	50 - 150 years	greater than 150 years	greater than 150 years
Leaf characteristics	elliptic to ovate, green golden or yellow or orange	ovate, bluish green or silver or gray green	needle, dark green
Flowering	flowers showy, fragrant pink, red or white, flowers in Spring	flowers inconspicuous, flowers in Spring	none
Fruits/Berries/Nuts	prolific, red or yellow pome, fruiting in Summer or Fall	fruitless	brown cone, fruiting in Winter
Bark	light gray, scaly	light gray, scaly	black, dark gray, light gray or light green, fissured
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist	moist to dry, drought tolerant	moist to dry
Maintenance Concerns	root damage potential rated as low	root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as moderate
Comments	edible fruit that wildlife uses, attracts birds and bees, deer palatable	fruitless with little or no pollen	attracts birds and squirrels, not deer palatable
Health Concerns	allergy health hazard	no known health hazard	allergy health hazard

	RESIDENTIAL and COM	MERCIAL TREE LIST	
Botanical name	Pistacia chinensis	Plantanus acerifolia	Prunus cerasifera
Common name	Chinese pistache	London plane	Purple leaf plum
Plant Picture #	22	23	24
Canopy/Shape	erect or spreading with a high canopy	erect or spreading and requires ample growing space	erect or spreading with a low canopy
Evergreen/deciduous	deciduous	deciduous	deciduous
Tree Size	H 25-35ft W25-35ft	H 70-80ft W 50-70ft	H 15-25ft W15-20ft
Growth Rate	24 inches per year	36 inches per year	24 - 36 inches per year
Longevity	grater than 150 years	greater than 150 years	less than 50 years
Leaf characteristics	pinnately compound even with oblong to elliptic leaflets, green red or orange	palmate, green, golden or yellow or orange	obovate, green, red or purple or bronze
Flowering	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring or Winter	flowers showy, fragrant white, flowers in Spring
Fruits/Berries/Nuts	prolific, red or mostly blue drupe, fruiting in Summer or Fall	prolific, brown or mostly green achene, fruiting in Summer	prolific, red drupe, fruiting in Summer, edible
Bark	dark brown, light gray or light green, furrowed or scaly	cream, light green light gray or multicolored, exfoliating or smooth	dark brown, fissured
Exposure	full sun to partial shade	full sun to partial shade	full sun
Soil	moist to dry, drought tolerant	wet to dry	moist but well drained
Maintenance Concerns	root damage potential rated as low, fire resistance is conflicting	litter issue is dry fruit, twigs and bark, root damage potential is rated as high	root damage potential rated as low, fire resistance is favorable
Comments	has a fragrant leaf, attracts birds	desirable wildlife plant, attracts bees	attracts birds and bees, has a fragrant flower
Health Concerns	allergy health hazard	allergy health hazard	no known health hazard

	RESIDENTIAL and CON	MERCIAL TREE LIST	
Botanical name	Pyrus kawakamii	Quercus agrifolia	Quercus coccinea
Common name	Evergreen pear	Coast live oak	Scarlet oak
Plant Picture #	25	26	27
Canopy/Shape	spreading with a low canopy	spreading and requires ample growing space	erect or spreading and requires ample growing space
Evergreen/deciduous	evergreen to partially deciduous	evergreen	deciduous
Tree Size	H 15-30ft W15-30ft	H 20-70ft W20-70ft	H70ft W50ft
Growth Rate	25 to 36 inches per year	24 inches per year	24 to 36 inches per year
Longevity	50 - 150 years	greater than 150 years	greater than 150 years
Leaf characteristics	elliptic to ovate, green	elliptic and hollylike, dark green	elliptic and lobed, green red or purple or bronze
Flowering	flowers showy, white, flowers in Spring or Winter	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring
Fruits/Berries/Nuts	brown or mostly green pome, fruiting in Spring or Summer	prolific, brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Fall or Winter
Bark	dark brown or light green, blocky or furrowed	dark gray, furrowed or smooth	black or dark brown, furrowed, scaly or smooth
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist	moist to dry	moist
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, fire resistance is favorable	litter issue is dry fruit, root damage potential rated as moderate
Comments	attracts birds	desirable wildlife plant, attracts birds and squirrels, deer palatable	desirable wildlife plant, attracts birds and squirrels, not deer palatable
Health Concerns	no known health hazard	allergy and poisonous health hazard	allergy and poisonous health hazard

	RESIDENTIAL and CON	MERCIAL TREE LIST	
Botanical name	Quercus douglasii	Quercus lobata	Quercus lobata
Common name	Blue oak	Holly oak	Valley oak
Plant Picture #	28	29	30
Canopy/Shape	erect or spreading with a high canopy	erect or spreading and requires ample growing space	erect or spreading or weeping and requires ample growing space
Evergreen/deciduous	deciduous	evergreen	deciduous
Tree Size	H 50-60ft W40-50ft	H 30-60ft W30-60ft	H 50-70ft W 50ft
Growth Rate	12 inches per year	24 inches per year	24 - 36 inches per year
Longevity	greater than 150 years	greater than 150 years	greater than 150 years
Leaf characteristics	oblong to ovate, bluish green or silver or gray green, golden or yellow or orange	lanceolate to ovate, dark green	obovate and lobed, green golden or yellow or orange
Flowering	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring or Winter	flowers inconspicuous, flowers in Spring
Fruits/Berries/Nuts	prolific, brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Winter or Summer	brown acorn, fruiting in Fall or Winter
Bark	light gray, furrowed, scaly or smooth	light green or light gray, furrowed or smooth	dark brown, light gray or light green, blocky or furrowed
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist to dry	moist to dry	moist to dry
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as moderate, fire resistance is favorable
Comments	desirable wildlife plant, attracts birds and squirrels, deer palatable	desirable wildlife plant, attracts birds and squirrels	desirable wildlife plant, attracts birds and squirrels, deer palatable
Health Concerns	allergy and poisonous health hazard	allergy and poisonous health hazard	allergy and poisonous health hazard

	RESIDENTIAL and COMMERCIAL TREE LIST			
Botanical name	Quercus palustris	Quercus rubra	Quercus shumardii	
Common name	Pin oak	Red oak	Shumard red oak	
Plant Picture #	31	32	33	
Canopy/Shape	spreading and requires ample growing space	erect or spreading and requires ample growing space	erect or spreading and requires ample growing space	
Evergreen/deciduous	deciduous	deciduous	deciduous	
Tree Size	H 50-70ft W 30-40ft	H 60-80ft W 50-70ft	H 70ft W 40ft	
Growth Rate	24 - 36 inches per year	24 - 36 inches per year	24- 36 inches per year	
Longevity	greater than 150 years	greater than 150 years	greater than 150 years	
Leaf characteristics	elliptic and lobed, dark green, golden or yellow or orange	elliptic and lobed, green, red or purple or bronze	elliptic and lobed, green, red or orange	
Flowering	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring	
Fruits/Berries/Nuts	brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Fall or Winter	
Bark	black, dark brown or dark gray, furrowed, scaly or smooth	dark gray or red brown, fissured	dark gray or light gray, fissured	
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade	
Soil	wet to moist	moist	wet to dry	
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as moderate	
Comments	desirable wildlife plant, attracts birds and squirrels, deer palatable	desirable wildlife plant, attracts birds and squirrels, not deer palatable	desirable wildlife plant, attracts birds and squirrels, not deer palatable	
Health Concerns	allergy and poisonous health hazard	allergy and poisonous health hazard	allergy and poisonous health hazard	

	RESIDENTIAL and COMMERCIAL TREE LIST			
Botanical name	Quercus suber	Quercus virginiana	Sapium sebiferum	
Common name	Cork oak	Southern live oak	Chinese tallow tree	
Plant Picture #	34	35	36	
Canopy/Shape	erect or spreading and requires ample growing space	erect or spreading with a high canopy	erect or spreading with a high canopy	
Evergreen/deciduous	evergreen	evergreen to partly deciduous	evergreen to partly deciduous	
Tree Size	H 70ft W 70ft	H 40-80ft W 60-100ft	H 40-80ft W 60-100ft	
Growth Rate	24 - 36 inches per year	24 - 36 inches per year	24 - 36 inches per year	
Longevity	greater than 150 years	greater than 150 years	greater than 150 years	
Leaf characteristics	oblong to ovate, dark green	elliptic to ovate, dark green	elliptic to ovate, dark green	
Flowering	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring	
Fruits/Berries/Nuts	brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Fall or Winter	
Bark	light green or light gray, fissured	black or dark brown, blocky, furrowed or scaly	black or dark brown, blocky, furrowed or scaly	
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade	
Soil	moist to dry, drought tolerant	wet to moist	wet to moist	
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as moderate	
Comments	desirable wildlife plant, attracts birds and squirrels	desirable wildlife plant, attracts birds and squirrels, deer palatable	desirable wildlife plant, attracts birds and squirrels, deer palatable	
Health Concerns	allergy and poisonous health hazard	allergy and poisonous health hazard	allergy and poisonous health hazard	

	RESIDENTIAL and COM	MERCIAL TREE LIST	
Botanical name	Tilia cordata	Sequoia sempervirens	Ulmus americana
Common name	Littleleaf linden	Aptos blue redwood	American elm
Plant Picture #	37	38	39
Canopy/Shape	erect or spreading with a high canopy	erect or spreading and requires ample growing space	erect or spreading and requires ample growing space
Evergreen/deciduous	deciduous	evergreen	deciduous
Tree Size	H 30-50ft W 15-30ft	H 70-100ft W 15-30ft	H 100ft W 100ft
Growth Rate	12 - 24 inches per year	36 or more inches per year	36 or more inches per year
Longevity	50 - 150 years	greater than 150 years	greater than 150 years
Leaf characteristics	round with cordate base, dark green, golden or yellow or orange	linear, bluish green or silver or gray green	oblong to ovate, dark green, golden or yellow or orange
Flowering	flowers showy, fragrant yellow or white, flowers in Summer	flowers in Spring or Winter	red, flowers in Winter
Fruits/Berries/Nuts	gray or mostly green capsule, fruiting in Fall	brown cone, fruiting in Fall or Winter	brown or mostly green samara, fruiting in Spring
Bark	light gray, fissured	red brown, fissured	dark brown or dark gray, exfoliating, furrowed or ridged
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist	moist	moist
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as high
Comments	desirable wildlife plant, attracts birds and bees	attracts birds	desirable wildlife plant, attracts birds and squirrels
Health Concerns	allergy health hazard	allergy health hazard	allergy health hazard

	RESIDENTIAL and COMMERCIAL TREE LIST			
Botanical name	Ulmus parvifolia	Zelkova serrata		
Common name	Chinese elm	Sawleaf zelkova		
Plant Picture #	40	41		
Canopy/Shape	erect or spreading or weeping and requires ample growing space	erect or spreading or weeping and requires ample growing space		
Evergreen/deciduous	evergreen to deciduous	deciduous		
Tree Size	H 40-60ft W 50-70ft	H 50-65ft W 50-65ft		
Growth Rate	36 or more inches per year	24 to 36 inches per year		
Longevity	50 - 150 years	50 - 150 years		
Leaf characteristics	elliptic to ovate, dark green, golden or yellow or orange	oblong to ovate, green, golden or yellow or orange		
Flowering	flowers inconspicuous, flowers in Summer or Fall	flowers inconspicuous		
Fruits/Berries/Nuts	brown or mostly green samara, fruiting in Fall	brown drupe, fruiting in Fall		
Bark	dark gray, light gray, orange, red brown or multicolored, exfoliating mottled or smooth	dark brown, light gray or light green, smooth		
Exposure	full sun to partial shade	full sun to partial shade		
Soil	moist	moist		
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as moderate	litter issue is dry fruit, root damage potential rated as moderate		
Comments	fire resistance is favorable	more resistant to Dutch Elm Disease than most elms	_	
Health Concerns	allergy health hazard	no known health hazard		

RESIDENTIAL and COMMERCIAL TREE LIST - NON POTABLE WATER			
Botanical name	Acer buergeranum	Acer campestre	Cedrus deodara
Common name	trident maple	hedge maple	deodar cedar
Plant Picture #	1	2	3
Canopy/Shape	spreading with a low canopy	erect or spreading with a low canopy	spreading or weeping and requires ample growing space
Evergreen/deciduous	deciduous	deciduous	evergreen
Tree Size	H 20-25ft W 20-25ft	H 25-35ft W 25-35ft	H 40-60ft W 20-30ft
Growth Rate	36 inches per year	12 inches per year	36 inches per year
Longevity	50 - 150 years	40 - 150 years	greater than 150 years
Leaf characteristics	lobed and palmate, green, golden or yellow or orange	palmate, dark green, golden or yellow or orange	needle, bluish green or silver or gray green
Flowering	flowers inconspicuous, yellow, flowers in Spring	flowers inconspicuous, green or chartreuse, flowers in Spring	flowers in Fall
Fruits/Berries/Nuts	brown or yellow samara, fruiting in Summer	brown samara, fruiting in Summer or Fall	brown cone, fruiting in Spring
Bark	light green or light gray, exfoliating	striking, dark brown or dark gray, fissured	dark gray, fissured
Exposure	full sun to partial shade	full sun to full shade	full sun to partial shade
Soil	moist	moist to dry and well drained	moist to dry, drought tolerant
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as moderate
Comments	attracts birds	attracts birds	attracts squirrels
Health Concerns	no known health hazard	allergy health hazard	allergy health hazard

RESIDENTIAL and COMMERCIAL TREE LIST - NON POTABLE WATER			
Botanical name	otanical name Cercis occidentalis		Pinus pinea
Common name	western redbud	desert museum	Italian stone pine
Plant Picture #	4	5	6
Canopy/Shape	erect or spreading with a low canopy	spreading or weeping with a low canopy	erect or spreading and requires ample growing space
Evergreen/deciduous	deciduous	deciduous	evergreen
Tree Size	H 10-20ft W 10-20ft	H 15-20ft W 20-25ft	H 40-80ft W40-60ft
Growth Rate	24 ti 36 inches per year	24 - 36 inches per year	24 - 36 inches per year
Longevity	40 - 150 years	40 - 150 years	50 - 150 years
Leaf characteristics	round, bluish green or silver or gray green, red or orange, deciduous	bipinnately compund, light green	needle, bluish green or silver or gray green
Flowering	flowers showy, purple, flowers in Spring	flowers showy, fragrant yellow, flowers in Spring or Summer	flowers inconspicuous
Fruits/Berries/Nuts	prolific, brown or purple legume, fruiting in Summer or Fall	brown legume, fruiting in Fall	brown or red cone, fruiting in Winter
Bark	dark brown or red brown, scaly	green, smooth	black, dark brown or dark gray, fissured
Exposure	full sun to partial shade	full sun	full sun to partial shade
Soil	moist to dry soil, drought tolerant	moist to dry soil, drought tolerant	moist to dry soil, drought tolerant
Maintenance Concerns	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as low	litter issue is dry fruit, root damage potential rated as moderate
Comments	fire resistance is favorable, desirable wildlife plant, attracts birds	desirable wildlife plant, attracts bees, has fragrant flower	desirable wildlife plant, wildlife uses it, attracts birds and squirrels, not deer palatable
Health Concerns	no known health hazard	no known health hazard	allergy health hazard

RESIDENTIAL and COMMERCIAL TREE LIST - NON POTABLE WATER			
Botanical name	Platanus racemosa	Quercus agrifolia	Quercus virginiana
Common name	California sycamore	Coast live oak	Southern live oak
Plant Picture #	7	8	9
Canopy/Shape	erect or spreading and requires ample growing space	spreading and requires ample growing space	erect or spreading with a high canopy
Evergreen/deciduous	deciduous	evergreen	evergreen to partly deciduous
Tree Size	H 30-80ft W 20-50ft	H 20-70ft W20-70ft	H 40-80ft W 60-100ft
Growth Rate	36 inches per year	24 inches per year	24 - 36 inches per year
Longevity	greater than 150 years	greater than 150 years	greater than 150 years
Leaf characteristics	palmate, light green, golden or yellow or orange	elliptic and hollylike, dark green	elliptic to ovate, dark green
Flowering	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring	flowers inconspicuous, flowers in Spring
Fruits/Berries/Nuts	prolific, brown or mostly green achene, fruiting in Summer or Fall	prolific, brown acorn, fruiting in Fall or Winter	brown acorn, fruiting in Fall or Winter
Bark	striking, cream or light green, exfoliating, furrowed or smooth	dark gray, furrowed or smooth	black or dark brown, blocky, furrowed or scaly
Exposure	full sun to partial shade	full sun to partial shade	full sun to partial shade
Soil	moist to dry	moist to dry	wet to moist
Maintenance Concerns	litter issue is dry fruit, leaves, twigs and bark	litter issue is dry fruit, fire resistance is favorable	litter issue is dry fruit, root damage potential rated as moderate
Comments	fire resistance is favorable, desirable wildlife plant, attracts birds	desirable wildlife plant, attracts birds and squirrels, deer palatable	desirable wildlife plant, attracts birds and squirrels, deer palatable
Health Concerns	allergy health hazard	allergy and poisonous health hazard	allergy and poisonous health hazard

RESIDENTIAL and COMMERCIAL TREE LIST - NON POTABLE WATER		
Botanical name	Sophora japonica	
Common name	Japanese pagoda	
Plant Picture #	10	
Canopy/Shape	spreading with a high canopy	
Evergreen/deciduous	deciduous	
Tree Size	H 40-70ft W 40-70ft	
Growth Rate	12 - 24 inches per year	
Longevity	50 - 150 years	
Leaf characteristics	pinnately compound odd with ovate to lanceolate leaflets, dark green, golden or yellow or orange	
Flowering	showy, fragrant white, flowers in summer	
Fruits/Berries/Nuts	prolific, brown or mostly green legume, fruiting in Summer or Fall	
Bark	dark brown, fissured	
Exposure	full sun to partial shade	
Soil	moist	
Maintenance	litter issue is dry fruit	
Concerns	and twigs	
Comments	fragrant flower, attracts bees	
Health Concerns	no known health hazard	

# APPENDIX C:

### Nursery Stock Specifications

Information from: Nursery Stock Specifications.

By Brian Kempf

Produced by the Urban Tree Foundation

Visalia, California

#### NURSERY STOCK SPECIFICATIONS

#### I. Proper Identification

All trees shall be true to name as ordered or shown on the planting plans, and shall be labeled individually or in groups by species and cultivar (where appropriate). Refer to www.urbantree.org/specs.htm for more information.

#### II. Compliance

All trees shall comply with federal and state laws and regulations requiring inspections for plant disease, pests and weeds. Inspection certificates required by law shall accompany each shipment of plants. Clearance from the County Agricultural Commissioner, if required, shall be obtained before planting trees originating outside the county in which they are to be planted. Even though trees may conform to county, state and federal laws, the buyer may impose additional requirements.

#### III. Tree Characteristics at the Time of Sale or Delivery

#### A. Tree Health

As typical for the species/cultivar, tree shall be healthy and vigorous, as indicated by an inspection for the following:

- Foliar crown density
- Length of shoot growth (throughout crown)
- Size, color and appearance of leaves
- Uniform distribution of roots in the container media
- Appearance of roots
- Absence of twig and/or branch dieback
- Relative freedom from insects and diseases

Note: Some of these characteristics cannot be used to determine the health of deciduous trees during the dormant season.

#### B. Crown

- 1. Form: Trees shall have a symmetrical form as typical for the species/cultivar and growth form.
- a. Central Leader: Trees shall have a single, relatively straight central leader and tapered trunk, free of codominant stems and vigorous, upright branches that compete with the central leader. Ordinarily, the central leader should not have been headed. However, in cases where the original leader has been headed, an upright branch at least one-half the diameter of the original leader just below the pruning point shall be present.

Note: This section applies to single trunk trees, as typically used for street or landscape planting. These specifications do not apply to plants that have been specifically trained in the nursery, e.g., topiary, espalier, multi-stem, clump, etc. or unique selections such as contorted varieties.

- b. **Main Branches (Scaffolds):** Branches should be distributed radially around and vertically along the trunk, forming a generally symmetrical crown typical for the species. Minimum vertical spacing may be specified.
  - 1. Main branches, for the most part, shall be well spaced.
  - 2. Branch diameter shall be no larger than two-thirds the diameter of the trunk, measured 1" above the branch.
  - 3. The attachment of scaffold branches shall be free of included bark.
- c. **Temporary Branches:** Unless otherwise specified, small "temporary" branches should be present along the lower trunk below the lowest main (scaffold) branch, particularly for trees less than 1-1/2" in trunk diameter. Temporary branches should be distributed radially around and vertically along the lower trunk. They should be no greater than 3/8" in diameter and no greater than one-half the diameter of the trunk at the point of attachment. Heading of temporary branches is usually necessary to limit their growth.

#### C. Trunk

- 1. Trunk diameter and taper shall be sufficient so that the tree will remain vertical without the support of a nursery stake.
- 2. The trunk shall be free of wounds (except properly-made pruning cuts), sunburned areas, conks (fungal fruiting-bodies), wood cracks, bleeding areas, signs of boring insects, galls, cankers and/or lesions.
- 3. Trunk diameter at 6" above the soil surface shall be within the diameter range shown for each container size below:

Container Size	Trunk Diameter (inches)
#5	0.5" to 0.75"
#15	0.75" to 1.5"
24" box	1.5" to 2.5"
36" box	2.5" to 4"

#### D. Roots

1. The trunk, root collar (root crown) and large roots shall be free of circling and/or kinked roots. Soil removal near the root collar may be necessary to inspect for circling and/or kinked roots.

- 2. The tree shall be well rooted in the soil mix. When the container is removed, the rootball shall remain intact. When the trunk is carefully lifted, both the trunk and root system shall move as one.
- 3. The upper-most roots or root collar shall be within 1" above or below the soil surface.
- 4. The rootball periphery should be free of large circling and bottom- matted roots. The acceptable diameter of circling peripheral roots depends on species and size of rootball. The maximum acceptable size should be indicated for the species (if necessary).

#### E. Moisture Status

At time of inspection and delivery, the rootball shall be moist throughout, and the tree crown shall show no signs of moisture stress, as indicated by wilt, shriveled, dead leaves, or bank die- back. Roots shall show no signs of being subjected to excess soil moisture conditions, as indicated by root discoloration, distortion, death or foul order.

#### IV. Inspection

The buyer reserves the right to reject trees that do not meet specifications as set forth in these guidelines or as adopted by the buyer. If a particular defect or sub-standard element or characteristic can be easily corrected, appropriate remedies shall be required. If destructive inspection of rootballs is to be done, the buyer and seller should have a prior agreement as to the time and place of inspection, minimum number of trees to be inspected or percentage of a species or cultivar, and financial responsibility for the inspected trees.

#### V. Delivery

The buyer should stipulate how many days prior to delivery that notification is needed.

#### **GLOSSARY:**

**Condominant - Stems:** Two or more vigorous and upright branches of relatively equal size that originate from a common point, usually where the leader has been lost or removed.

**Crown:** The portion of a tree above the lowest main (scaffold) branch, including the trunk, branches and foliage.

**Cultivar:** A named plant selection from which identical or nearly identical plants can be produced, usually by vegetative propagation or cloning.

**Girdling Root:** A root that partially or entirely encircles the trunk and/or large buttress roots, which could restrict growth and downward movement of photosynthate.

**Included Bark:** Bark embedded within the crotch between a branch and the trunk or between two or more stems that prevents the formation of a normal branch bark ridge. This often occurs in branches with narrow-angled attachments or branches resulting form the loss of the leader. Such attachments are weakly attached and subject to splitting out.

**Kinked Root:** A primary root (s), which is sharply bent, causing a restriction to water, nutrient and photosynthate movement. Kinked roots may compromise the structural stability of roots systems.

**Leader:** The dominant stem which usually develops into the main trunk. Photosynthate pertains to sugar and other carbohydrates that are produced by the foliage during photosynthesis, an energy trapping process.

**Root Collar:** The flared area at the base of a tree where the roots and trunk merge. Also referred to as the "root crown" or "root flare".

**Shall:** Used to denote a practice that is mandatory.

Should: Used to denote a practice that is highly recommended.

Scaffold Branches: Large, main branches that form the main structure of the crown.

**Temporary Branch:** A small branch that is retained temporarily along the lower trunk of young trees. Temporary branches provide photosynthate to increase trunk caliper and taper and help protect it from sunburn damage and mechanical injury. Such branches should be kept small and gradually removed as the trunk develops.

**Trunk:** The main stem or axis of a tree that is supported and nourished by the roots and to which branches are attached.

For more information, contact:

Urban Tree Foundation
Brian Kempf
1512 W. Burrel Street Visalia, CA
93291 559/713-0631

brian@urbantree.org

## **APPENDIX D:**


### Maintaining Street Trees

#### MAINTAINING STREET TREES

There is a variety of maintenance needed in the stages of a tree's life, and therefore this document can only begin to discuss the bare necessities. Consult books from garden centers or libraries for information as needed, or call the City's Parks and Recreation Department with specific maintenance questions.

#### <u>Planting</u>

Choose the appropriate tree size and form for your project. Make sure you are able to match the sun, soil, and watering requirements listed in the "Street Tree List" spread- sheet in Appendix B. Obtain planting details from the City's Parks and Recreation Department to ensure you are properly planting, mulching and staking the trees.

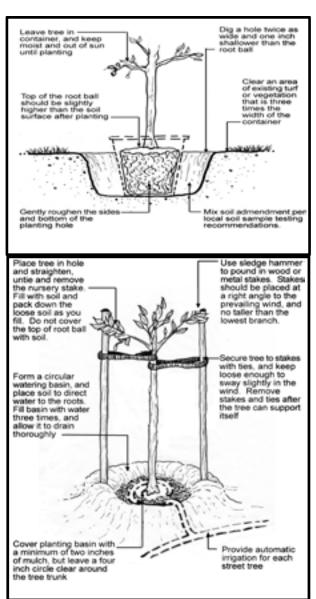

- November to January is the best time to plant trees; try not to plant in the hot summer months.
- Insert root deflection barrier panels in all planting areas located within 5 feet of hardscaping, buildings, walls, and underground utilities. Install barriers parallel to the elements needing protection.
- Stake and tie the tree at right angles to the prevailing wind direction, and keep it loose enough to allow the tree to sway slightly with the wind. Tree stake should not be taller than the lowest lateral branch.
- Install mower guards or tree grates, if needed, consult manufacturers specifications for installation methods

#### Soil Preparation and Conditioning

- Dig a planting hole to a minimum of 30-inches deep and with a width a minimum of three times the diameter of the trees container. Generally, the hole should be twice the size of the tree's nursery container, and 1 inch shallower than the top of the tree's root ball.
- The height of the root ball should sit 1 to 2-inches higher than grade level to prevent settling and drowning the tree as it establishes itself. Make the hole deep enough to allow the root ball of the container to rest on the firm undisturbed soil.
- All debris fragments over 2-inches in diameter shall be removed from the planting hole to a minimum of 24-inch depth.
- Break up and loosen the soil on the sides and the bottom of the pit. The soil beneath the rootball should be packed down to prevent settling.
- Add soil amendments as needed based on the type of soil you will be planting in. Ask a registered Landscape Architect, licensed Landscape Contractor, University Agriculture Extension, or the Parks and Recreation Department if you are unsure of the amendment you need.

• Apply at least a 2 inch layer of mulch inside the planting hole, but keep the mulch a minimum of 2 inches away from the tree trunk. Reapply the mulch as needed throughout the life of the tree.

#### **Drainage**

- A percolation test shall be conducted to make sure water adequately drains away from the new trees. A minimum of one test per site shall be conducted and reviewed prior to tree installation. Locations with poor drainage can be improved with one of the following mitigation measures:
  - Install a French drain which radiates away from the tree, and make the grade fall away from the tree trunk.
  - Install drain tiles or perforated pipes which directs the water away from the tree.
- Perform a percolation test by checking the soil you will be planting in. Dig a 2 feet deep hole and fill it with water to see how quickly it drains. The water should drain a minimum 2 inches per hour. If you are unsure about your soil or have concerns, take a sample to a soil lab for testing. Sites with poor drainage will need reviewing by a registered Landscape Architect or Arborist, and may require additional testing.
- For trees to be planted in severely compacted soils, aeration tubes may be required. Aeration piping (rigid or flexible), may be necessary in side- walk planters, planting strip, medians, or tree wells with compacted soils. Aeration tubes circle the bottom of the planter, and the number to use depends on the tree size you are planting and the soil composition (see the Aeration Tube Table). If you have compacted soils, ask the City's Park and Recreation Department for additional information about aeration tubes.

AERATION TUBE TABLE	
TREE SIZE	NUMBER OF TUBES
15 gallon trees	one tube
24' box trees	two tubes
36' box trees	two tubes
48' box trees or larger	four tubes or as needed

#### Watering

Water consumption by trees in a city is a critical factor in the selection, success and sustainability of the urban forest. Trees must be able to survive with the amount of water you will be providing, and you should first consider the quantity of water the tree needs, and the type of watering you will be delivering throughout its life cycle. Start by determining the amount of water your tree species needs based on the Street Tree List in Appendix B, refer to the Sunset Western Garden Book, or search <a href="http://selectree.cagr.calpoly.edu/">http://selectree.cagr.calpoly.edu/</a> for information on street trees not yet listed. Also, decide on the type of watering system you will be using for the trees based on the following information before you plant the street trees.

#### **General Watering Guidelines**

- There are many factors that contribute to a tree's watering requirements, and they should be considered before choosing the trees you will be planting. Soil properties, irrigation methods and performance, and microclimate variables such as wind and sun all affect the amount of water needed to sustain a tree.
- Test to see how quickly your soil drains, and/or have a soil test preformed prior to planting your tree. Fill your planting hole with water and time how long it takes for the water to absorb into the soil. This will

give you a general idea about the soils water holding capacity. Note that soils vary greatly even on one piece of property and each hole should be tested.

- Check the soil moisture in the root ball after the tree is first watered and time how long it takes the soil to dry out. Schedule watering periods to allow the soil around the tree to dry out slightly, but not become completely void of water.
- Plant trees with a circular mound of soil around the planting hole. Direct the water towards the trunk of the tree, mulch and reestablish the mound as needed throughout the trees lifetime.
- Water in early morning or late evening to slow evaporation rates.
- It is usually a good idea to plant and group trees with similar watering requirements. The trees can then be combined on the same irrigation valve and have a similar watering sched- ule.
- Irrigation should be checked in the spring of each year to make sure it is still working cor- rectly.
- As the trees become established, you can water less frequently. The watering times and amount of moisture will vary on temperature and winds, but a general schedule is:
  - 1-3 months: Water when root ball soil becomes dry
  - After 3-6 months: Water twice a week
  - After 6-12 months: Water twice a month
  - After 1 year: Water every 3 to 4 weeks in cool seasons, and twice a month in hot times of the year.

#### **Encourage Deep Roots**

- It is always best to water thoroughly and frequently to encourage deep rooting in the soil. Try to wet the tree's entire root zone when watering, but do not apply too many heavy soakings. It is necessary to let the soil dry out slightly so that the tree will not drown. Test the soil, and if the top 3 to 4 inches of soil is dry, it is time to water again.
- Do not apply just light sprinklings because they can be very damaging. Roots develop only where water and nutrients can be found, and shallow watering tends to produce surface roots.
- Watering requirements will depend on the type of soil you are planting in. In most cases, clay soils drain slowly and hold more water, sandy soil drain faster, and loamy soils are somewhere in the middle.
- To wet tree roots to a depth of 6 feet, a general method of watering is:
  - Clay Soils: Fill the basin, let it drain, and then repeat 3 more times
  - Loam Soils: Fill the basin, let it drain, and then repeat 1 more time
  - Sandy Soils: Fill the basin only once

#### **Irrigation Systems**


- Hand watering with a hose is an inexpensive method of irrigation, but it takes a lot of time
  and energy and is not a reliable long-term system. If a property owner moves or goes on
  vacation, the trees can become neglected and hand watering is therefore not
  recommended for street trees.
- Sprinkler systems are one of the simplest methods of watering and can quickly cover large areas. If improper design or system operation failures occur, sprinklers can contribute to the formation of surface roots, waste water by overspray and run-off, and can encourage foliage diseases.
- Drip irrigation systems are a good choice for street trees, and are relatively inexpensive and very adaptable. Drip systems apply the water directly to the location desired and make it easy to control the amount of water delivered to the tree. Drip systems are very flexible, and the drip emitters can be combined with spray heads and soaker tubing if needed.
- Check your water pressure before deciding on how you will be applying water, and make sure you have enough pressure to successfully run an irrigation system.
- Proper on-going system maintenance must be implemented to ensure successful longterm water application.
- Check with a local nursery or Landscape Architect if you have additional questions or concerns about watering and irrigation systems

#### **Pruning Trees**

Pruning may be the most important maintenance duty to carry out on young trees if they are to become healthy mature specimens. The energy invested in training a young tree will be much less than corrective pruning of neglected adult trees. Waiting to prune a tree until it is fully developed could create the need for more substantial cuts, and make it very difficult for a tree to recover.

When planting young trees; prune only the weak, dead, or injured branches. Remove any torn or broken branches, but reserve other pruning for the second or third year. Pruning of new trees should be restricted to corrective pruning, and no more pruning should take place in one year than is needed to develop the form and strength of a tree.

When a tree is young, avoid removing the small side branches that develop along the trunk because they help the tree increase in size and create a sturdier trunk. Small cuts tend to do less harm to the tree than larger cuts, and by removing only the problem branches the young trees can use all their strength to develop a healthy root system. It was once believed that wound dressings speed up the healing of a pruned limb, however, recent research has shown that dressings do not reduce decay, and rarely prevent infestations.

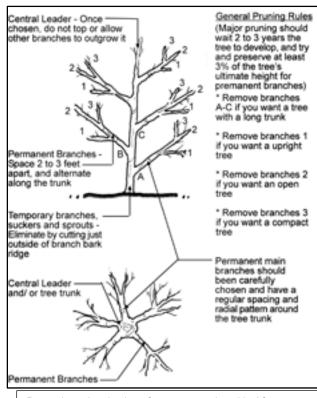

Proper branch selection of a young tree is critical for a healthy trunk development

Most street trees will require pruning, and maintenance accessibility must be considered in tree placement. Proper pruning is essential to the health of the trees, and correct pruning techniques most be researched and incorporated into the maintenance of the trees.

#### General Pruning Rules

- Prune evergreen trees in late fall, and deciduous trees when all their leaves have dropped. This may vary in emergency situations, but it is best to prune when the tree is dormant.
- Trees planted along sidewalks, roadways, bikeways and parking areas must have their lower branches pruned up above the height of passing traffic. These branch heights must be maintained throughout the tree's life (See Sections for Street Types in Appendix A).
- Generally do not prune:
  - The top of a tree
  - The lower branches of a tree, except for necessary clearance

#### Trunk Development

When training a new tree, first identify the main limbs that will ultimately make up the tree's skeleton. Unless the tree has a natural multi-stemmed pattern, most young trees should be trained to a single central leader. Select main limbs that have open angles of connection to the trunk, even spacing, and radial distribution around the trunk. Optimally, major limbs should be spaced 24 to 36 inches apart on alternating sides of the trunk. Trees with major branches occurring in pairs across the main stem can be pruned alternately up to a height of 12 to 18 feet.

The central leader is the topmost vertical stem extend- ing from the trunk. Do not prune the tip of this leader, or allow less important branches to outgrow it. Some- times a tree will develop two or more leaders; and if their growth is allowed to continue, it could lead to structural weakness, so it is best to eliminate them while the tree is small.

Never cut the main branches back to stubs, or cut the tops off a tree ("topping"). Many people mistakenly top trees because they are growing too tall. Unfortunately, the topping the tree is self-defeating, and studies have shown that topping reduces the tree's nutrient production, makes the tree more vulnerable to attacks by insects and diseases, and unwanted and weak limbs usually grow back even taller than the cut branch. Proper pruning can alleviate unnecessary growth, and eliminate the problems topping creates.

#### **Branch Selection**

Lateral branches add to the growth of a strong trunk, and during the tree's early development it is vital to leave some temporary branches on the tree at lower than the eventually branch height desired. These are temporary branches which will help protect the trunk from sun and injury, but need to be kept small enough not to be in the way or compete with the chosen permanent branches.


The choice and spacing of permanent branches on and around the trunk is very important. Branches selected as permanent branches must be properly located along the trunk, and preserve a sense of balance with branches by allowing them to grow outwards in each direction. The permanent branches should be vigorous, and have a stem diameter of 1/2-inch or less where the branch attaches to the trunk. Remove

any laterals that have grown inward toward the center of the crown, higher than the main leader or beyond the crown. Never let one limb grow directly over a lower one, and prune back laterals that grow taller than the leader. Eliminate the weak sprouts and suckers off the trunk, and always cut just outside of the branch bark ridge to reduce injury to the branch collar.

Avoid pruning too much of the interior canopy of the tree because the foliage on each limb must produce enough nutrients to keep that branch growing. Pruning of too many leaves can damage the tree and lessen its maturity, and try to keep at least one-half of the leaves on the branches on the lower two-thirds of the tree, and try to maintain at least 3 percent of the tree's ultimate height for the vertical spacing of permanent branches. Stagger the branches so that they do not occur over one another on the same side of the trunk. For example, a tree that will reach 50 feet in height should have the permanent branches alternating, and occurring 15 inches away from each other along the trunk.

#### Pruning Tips for Young and Mature Trees

- Prune when the trees are dormant (usually December to February) to have the least amount of harm to the tree.
- Use strong enough tools for the job: pruning shears for small cuts, loppers for limbs thicker than a broom handle, and saws for more mature branches.
- Never use dull tools, and switch to another tool if you can't cut the branch easily.
- Thoroughly clean tools with rubbing alcohol after pruning to prevent the transfer of pests and/or diseases between trees.
- Generally do not prune more than 25 percent of a young tree's canopy in one year. As the trees grow, be prepared to reevaluate your branch selection.
- For larger branches, us the three step cutting process shown in the Pruning Methods for Mature Tree Branches to avoid wounding the tree.
- Tie string on the branches you are considering keeping, step back and look at them, and then cut.
- Remove any excessive growth which interferes with the leader and permanent branches, but prune in a manner which allows the tree's natural form to continue to develop.
- Consider how large a tree will ultimately become before planting, and do not attempt to make the tree fit to you site by excessive pruning.
- Consult a profession Arborist, Landscape Architect, or certified Nurseryman if you have any additional questions or pruning needs not covered in this text.



### <u>APPENDIX E:</u>

### Structural Soil Specifications

Information from: LATIS, Structural Soils.

By Jason Graboskym Nina Bassuk, and Peter Trowbridge.

Published by the American Society of Landscape Architects.

Washington DC. 1999.

### STRUCTURAL SOILS: A NEW MEDIUM TO ALLOW URBAN TREES TO GROW IN PAVEMENT

#### Description of the Problem

The fact that trees have difficulties surviving amid the conditions of urban and suburban environments is not a surprise. Urban areas for the most part are not designed with trees in mind. They are often treated as if they were afterthoughts to an environment built for cars, pedestrians, buildings, roadways, sidewalks and utilities. Studies point out that trees surrounded by pavement in the most urban downtown centers live for an average of 7 years (Moll, 1989 Craul, 1992; American Forests, 1997), while those in tree lawns, those narrow strips of green running between the curb and sidewalk, live up to 32 years. These same species might be expected to live anywhere from 60 to 200 years in a more hospitable setting.

#### Why is this so?

Urban trees experience a virtual litany of environmental insults such as increased heat loads, de-icing salts, soil and air pollution and interference from utilities, vehicles and buildings (Bassuk, Whitlow, 1985; Brady, 1990; Craul, 1992). Yet the most significant problem that urban trees face is the scarce quantity of useable soil for root growth (Lindsey, Bassuk, 1992). A large volume of non-compacted soil, with adequate drainage, aeration, and reasonable fertility, is the key to the healthy growth of trees (Perry, 1982; Craul, 1992). The investment in soil for a healthy tree is paid back by fulfilling the functions for which it was planted. These functions may include shade, beauty, noise reduction, wind abatement, pollution reduction, wildlife habitat and the creation of civic identity (Heisler, 1974; McPherson, et. al., 1994). An adequate soil volume is key considering soils are where nutrients, water and air are held in a balance that allows for root growth, water and nutrient acquisition. Simply put, when soils are inadequate, plant growth suffers and trees die prematurely.

#### Soil Terminology

The usefulness of any given soil is largely dictated by its texture, structure and fertility. Soil texture or the percentage of sand, silt and clay in a given soil type, is an important parameter to define. Several soil characteristics, including sand, silt, clay and organic matter make up the solid portion of soil, while water and air make up the rest. Nutrient-holding capability is regulated by the proportional amount of clays and organic material in the soil. A soil's susceptibility to compaction will be determined by the soil's particle size distribution and the total amounts of silts and clays in the soil. Soil hydraulic characteristics, including moisture- holding, aeration and drainage, will be determined, in part, by the types of soil particles present in the soil matrix. The compacted bearing capacity, frost-heave potential, and other engineering characteristics are intrinsically tied to the soil texture.

Beyond soil texture, soil structure which is the aggregation of individual sand, silt and clay particles into larger clumps called peds, heavily influences the agricultural viability of a soil. Within these aggregates, water may be held against the force of gravity, making it available to the plant's roots. Good structure or well aggregated soils provides pores that allow water to drain and aeration of the root zone to take place. Human activities can severely damage soil structure.

The process of building in a city, or even installation of a sidewalk in an otherwise rural area,

necessarily dictates a high level of soil disturbance. Any construction effort requires soil excavation, cut and fill, re-grading and soil compaction. Often highly efficient heavy machinery is brought on site to accomplish this work increasing the potential for compaction of soils (Randrup, 1997). There are two critical effects of soil compaction which directly impact plant growth. 1) Soil structure is destroyed, crushing the majority of large interconnected pores (macro pores) which restrict water drainage and subsequent aeration. 2) As the macro pores are crushed, soils become denser, eventually posing a physical barrier to root penetration. There are numerous accounts of urban soils being literally as "dense as bricks" (Patterson, 1980).

One method of evaluating relative compactness, or the severity of soil compaction, is to measure the soil's weight per volume, or its density. This measurement is communicated either by bulk density or by dry density. Dry density is the dry weight of soil per a given volume, often expressed as grams dry weight/cm 3 (g cm-3 or Mg m3). Soils, depending on their texture, become limiting to root growth when their dry density approaches 1.4 g cm3 for clayey soils to

1.7 g cm<sup>3</sup> for sandy soils (Morris and Lowry, 1988). When roots encounter a soil so dense that they cannot penetrate it, the roots may change direction if that is possible, or be stopped from growing altogether. Very often in the urban environment, roots coming out of a newly planted root ball into compacted soil will grow from a depth of 12 or 18 inches up where they remain just below the surface (Grabosky-Bassuk, unpublished data). This superficial rooting tends to make urban trees more sensitive to drought as soils dry out in the summer (Bassuk-Whitlow, 1985).

Conversely, when a tree is planted into compacted soil and drainage is impeded through the crushing of soil macro pores, water may remain around the root zone depriving the roots of needed oxygen. This can lead to root death and an impaired ability to take up water and nutrients that are necessary for tree growth.

In urban soils that are not covered by pavement, it is possible to cultivate, amend or replace compacted soils to make them more conducive to root growth. However, where soils are covered by pavement, the needs of the tree come in direct opposition to specifications that call for a highly compacted base on which to lay pavement. All pavements must be laid on well-draining compacted bases so that the pavement will not subside, frost heave, or otherwise prematurely require replacement. What is Proctor density?

In order to create predictably compacted base course materials, a test is typically used called 'Proctor density' or 'peak density'. This assures that the base below the pavement is compacted sufficiently to meet the wear that it will receive. For any type of soil or aggregate, Proctor density is defined by ASTM D 698-91 method D protocol. The soil type to be used is tested with the same amount of compactive effort, 56 blows from a 5.5 pound hammer free-falling 12 inches for each of 3 layers in a 6 inch diameter mold of 4.6 inch depth, at different moisture content. As the soil moisture content increases, the standard Proctor effort will result in a higher soil dry density as water in the soil acts as a lubricant, allowing soil 5 particles to pack and nest closer to one another. The end result is an increase in dry density or dryweight per volume, of the sample. Eventually, there will come a moisture level where the water in the soil actually holds the soil solids apart, resulting in a lower dry density after the standardized compaction effort. This relationship of soil dry density resultant from a standardized compact effort, over a range of moisture contents, can be graphed as a moisture-density curve. The maximum estimated dry

density from the moisture-density curve is defined as 100% Proctor density. The actual dry density at 100% Proctor will vary depending on soil texture or stone aggregate size distribution. In the field, it is often required that soils or bases under pavement be compacted to within 95% Proctor density. This means that soils are often at dry densities greater than 1.8 or 1.9 g cm3. Thus, soils, that must support pavement are often too dense for root growth. It is not surprising then that urban trees surrounded by pavement have the shortest life span in cities (Moll, 1989 Craul, 1992; American Forests, 1997; McPherson et. at. 1994). Simultaneously, these paved areas also tend to be those that need trees the most to mitigate the heat island microclimate that exist in downtown areas.

#### How much soil volume does a tree need?

If it is recognized that urban trees are desired and necessary to the health and livability of our cities, how much useable soil is necessary to allow them to fulfill their design functions? Research at Cornell's Urban Horticulture Institute (UHI) has shown that a reasonable 'rule of thumb' for most of the United States, except for the desert southwest, is to plan for two cubic feet of soil per every square foot of crown projection. The crown projection is the area under the drip line of the tree (Lindsey and Bassuk, 1991). If the tree canopy is viewed as symmetrical, the crown projection can be calculated as the area of a circle (Pi x radius squared). For example: for a tree with a canopy diameter of 20 feet, the crown projection would be, 3.14 (10 squared), or 3.14 (100) = 314 square feet. Using the 'rule of thumb' an estimate can be calculated that the tree needs 628 cubic feet of soil to support it. Assuming a useable rooting depth of 3 feet, one way of dimensioning the space needed for this tree would be 21' x 10' x 3', or 630 cubic feet. It is clear that the typical 4' x 5' tree opening in the sidewalks, or the 6' x 6' tree pit is inadequate to allow the tree to fulfill its function in the landscape.

#### Where can one find enough soil?

Under the sidewalk there is a potential for a large volume of soil that would be adequate to allow trees to reach their 'design size' as long as the soil volume for each tree was connected and continuous, giving each tree a chance to share soil with its neighboring tree. Looking at the forest as a model, trees may be spaced reasonably close together as long as they share a large common soil volume to support their needs. Therefore, the task is to find a soil that meets a pavements design requirements while simultaneously allowing for unimpeded root growth under the pavement. To do this, the authors envisioned a two-part, or gap-graded, soil system that could be compacted to 100% Proctor density while still allowing roots to grow through it. The primary component of this "soil" system is a uniformly sized, highly angular crushed stone or crushed gravel. Ranging from 1 to 1 1/2 inches in diameter with no fine materials. If this single-sized stone is compacted, the stones would form an open stone skeleton with about a 40 percent porosity. For a similar single-sized spherical stone, a structure with 33 percent porosity would be produced (Shergold, 1953). Friction between the stones at contact points would "lock in" forming the load-bearing structure of the mixture. The second component of this mixture is a soil which partially fills the stone voids. As long as we do not prevent the stone structure from forming by adding too much soil, the soil in the voids will remain largely noncompacted and root penetrable.

#### Structural Soils: How do they work?

Structural soil mixes are two-phase systems comprised of a stone skeleton or lattice for strength and soil for horticultural needs. Structural soils depend on a load-bearing stone skeleton to support the pavement. The lattice provides stability through stone-to-stone contacts while providing

interconnected voids for root penetration, air, and water movement. The friction between the stones provides the strength. A narrow particle size distribution of the stone is chosen to provide a uniform system of high porosity after compaction. The system assumes full compaction to construction standards. Angular stone is selected to increase the porosity of the compacted stone lattice. As the stone is the load-bearing component of the system, the aggregates should meet regional Department of Transportation aggregate soundness and durability requirements for pavement base aggregates.

The soil in the design mixture should be a loam to heavy clay loam, lacking in all but fine sands. The soil in the system will be present in small amounts so as not to interfere with the stone lattice. Organic materials are not used in modifying the soil for use in a structural soil system at this point since they are generally avoided in normal pavement material selection. As a result, clay materials are needed for nutrient-holding and water-holding capacity. By carefully choosing the stone, soil and mixing ratio, we can create a gap-graded material able to provide the air and water balance necessary for root growth and plant establishment. The soil should also meet nutritional soil requirements for plant growth. The objective is to partially fill the stone lattice voids with soil. The soil is meant to coat the stones and reside within the stone lattice. The compaction of the mixture would form the stone structure while the soil in between the stones remains largely non-compacted. The intention is to "suspend" the soil between the stones, which come together during compaction, producing a load-bearing, compacted stone lattice with uncompacted soil in the voids. When properly designed and compacted, the system will have large voids providing room for root growth and aeration of the root zone.

To accomplish the objective, the ratio of soil-to-stone materials is a major consideration. If the stone voids are completely filled, aeration and bearing capacity of the system are compromised. Variability during the mixing process can occur, creating a mixture that is over-filled with soil. For any given stone, the addition of soil will change the formation of the stone lattice. This change in the lattice results in an unacceptable decrease in bearing capacity if over-filled with soil. One cannot simply estimate the voids in a compacted bucket of stone and add an equal amount of soil, and expect success for stability or plant establishment.

Any structural soil mix should assume compaction normally expected in construction of pavement sections. Compaction is often specified as a percentage of a peak density from a standard moisture-density curve (such as Proctor density) or a specified testing protocol (such as AASHTO T-99). Compacting to 95 percent peak density in this manner only gauges relative compactness, and does not imply 5 percent porosity. This density measure gives a quality control mechanism to measure compactness and serves as a benchmark from which to evaluate the material for other engineering behaviors, such as bearing capacity, hydraulic conductivity, and plant available moisture in a system expected in the field.

The bearing capacity of the material is important, since the materials will be under large portions of pavement, and may need to support vehicular traffic. The bearing capacity can also influence the thickness, and thus the cost, of the pavement. One criterion of use is the California Bearing Ratio (CBR) which can relate to other pavement design parameters such as modules of sub-grade reaction. This method gauges the bearing capacity of a material by comparing it to a standard material known to be acceptable. For ease in pavement design protocol, it would be advisable to require a CBR greater than 50 in structural soil. The result is a material which can be compacted and provide a more stable

base than found in many current sidewalk installations. This translates into a durable pavement design that can support tree establishment.

Testing for horticultural viability entails testing and observation of plant response over a period of time. Empirical data on plant response and growth analysis in controlled system applications remain the best method for evaluation. Research at UHI has shown that trees can grow well in structural soil mixtures (Grabosky, 1995, 1996, 1999).

One problem in designing the system is getting the mixture to blend uniformly and remain so during shipping, placement, and compaction. Due to mixing variation, it is not advisable to simply assign the maximum amount of soil possible. In fact, there is an observed loss in acceptable bearing capacity before the non-compacted soil fills the stone voids. This phenomenon has been observed when the mixture's compacted stone lattice becomes 65% filled with a soil calculated from the soil's premixed bulk density (Grabosky 1999).

At UHI, it has been found that the structural soil process benefits from adding a tackifying agent to stabilize the mixing process (Grabosky 1995). The tackifier allows for the stones and soil to mix more uniformly and prevents separation of the materials resulting from vibration in transit, dumping, and the working of the material in installation. Potassium propenoate- propenamide copolymer, agricultural hydrogel, has been used as tackifier with success.

#### Mixing Methods

To determine the ratio of stone to soil it is advisable to make three small test blends of slightly different ratios. A useful starting point is 15 percent to 20 percent soil by weight. We have found it best to define and control mixing ratios on a weight basis. Weight ratios avoid the difficulties encountered by variable volume-to-weight relationships and the changes in density of a given soil relative to its depth in a stockpile moisture content or its handling. The hydrogel is included at very low rates and is held at a constant rate relative to the stone for mix design purposes. These materials can then be tested to develop their respective moisture- density relationships (per ASSHTO T-99) and provide a compaction protocol. The materials can then be tested for their respective California Bearing Ratio at their expected installed densities. The results will give a base-line guide as to how much soil can be safely included in the mix design. Our experience in research trials at UHI has been that if the structural soil meets the bearing capacity criterion of CBR greater than 50, at peak ASTM D 698 (AASHTO T-99) density, tree roots can penetrate and trees can be established successfully. The field compaction criterion for acceptance necessarily requires 95 percent peak density.

Once the mix ratio is identified there are two methods of mixing. The first is mixing on the flat with a front-end loader. In this method, the stone is spread into a layer on a paved surface, the hydrogel is evenly spread onto the stone, followed by a moist soil layer. This layered approach could be repeated into a six-layer pile if the loader is large enough to effectively mix the material. Then the layered system is turned and mixed until uniformly blended. If the system is too dry, additional moisture may be added to assist in mixing. The hydrogel could also be distributed as a slurry to help in this regard. The material should not exceed its optimal moisture content for compaction (determined from the moisture-density curve).

The drawback to mixing on the flat is that the mixing occurs on a volumetric basis. This requires knowing the volume of a "bucket-load" of material and its weight to convert into a weight ratio. The soil density varies as the material is taken from the soil stockpile. This means the weight per unit volume may change as the project progresses, changing the mixing ratio. This can be overcome by knowing the total stockpile weight and mixing the total with the appropriate weight of stone, and mixing the total project in batches. The batches are placed into a common pile and mixed again for consistency. This method requires little investment in equipment for a municipality, as most have the machinery to mix the materials. This approach is geared to small projects, limited to 600 cubic yards of material or less. If the mixing operation requires using or stockpiling larger quantities, there are mixing labor expenses and mixture consistency issues to contend with which may limit this mixing approach.

A second approach would be to use a pug mill. Pug-mill operations could mix structural soils on a weight basis with the ability to adjust moisture levels. The mixing contractor is likely to be familiar with the location or availability of pavement testing facilities. The milling operation can mix large quantities of material in a far shorter time period with the ability to apply quality controls.

#### Appropriate Usage

Structural soils in the context of this discussion have specific uses. The material supports pavement designed to withstand pedestrian and vehicular traffic. The materials can be designed for use under pedestrian malls, sidewalks, parking lots, and possibly some low-use access roads. The material is intended as a tool to be used when there are no other design solutions to provide adequate soil volumes for trees in close proximity to pavement.

Structural soils can be used as base material under pavement. The base material can be designed to act as a root exclusion layer to buffer the pavement from the pressures generated from expanding roots in secondary radial growth. While there is no definitive data related to radial root expansion to logically assign a base thickness, our research has shown that tree roots in structural soil profiles grow deep into the material below the pavement. The same research showed a lack of root development in the surface 12 inches below the pavement surface. It is anticipated that moving the roots down to the sub-grade will distribute those root pressures over a wider section of pavement, reducing or eliminating sidewalk heaving.

By design, structural soils are fully compacted with conventional equipment to standard relative compactness (full Proctor density). Also by design, it can serve as the sub-base for the entire pavement section. Where there is a tree to be installed, the material can be allowed to rise to surface grade where the trunk pavement opening will occur. This provides an opportunity for watering, drainage, and passive aeration systems to the surface as well.

Below the pavement there can also be a base material of well-graded large aggregate that should possess no fine sands, silts or clays. This standard base layer could be to a depth normal for regional installation protocol or six inches. To discourage rooting in this layer, a geo-textile may be used between this base and the structural soil sub-base. The geo-textile should not restrict water movement. The sub-

base is the structural soil material, in a layer thickness of 18 to 36 inches. Research studies are planned to determine cost-effective layer thickness.

Provision for an irrigation-aeration system between the base and sub-base materials may be considered. Given the large volume of structural soil for tree roots to explore, this need for irrigation is a long-term view of future management needs that needs to be evaluated as the tree eventually matures. While there is less moisture in a structural soil on a per volume basis, the total root system occupies most of the pavement area. Fertilization can be dissolved into the irrigation water for nutritional management. There must also be positive drainage provided to prevent water-logging. The sub-grade below the structural soil will still be compacted and rendered essentially impermeable to moisture. A perforated drain connected to the storm drainage system should be placed between the structural soil material and the compacted sub-grade.

Plant selection for structural soils should aid toward alkaline-tolerant and drought tolerant plant species. The pH of the system will be immediately dominated by the soil chosen. The stone used, whether limestone or granite, will heavily influence pH. However, if the system is paved with concrete products, the pH will continue to climb as the concrete slowly breaks down. A structural soil system provides an opportunity for choosing alkaline-tolerant species that do not respond well to compacted soil and its effects on root-soil processes.

Planting a tree into structural soil is fairly simple. The pavement opening is expanded to 6 by 6 feet to allow for buttress root formation on older trees. The wider opening could be paved in removable pavers. The tree is simply planted into the structural soil as it would be in a normal, albeit very stony, field situation. The roots would be expected to immediately contact the structural soil and grow into the material. It is presumed that supplemental irrigation will be provided during the first growing season.

#### **Reasons for Caution**

Many individuals have employed systems termed 'structural soils'. Indeed, our effort may have contributed to the term's popular usage. As all soils possess a structural component, the term structural soil is conceptually useful to identify a product but ill-suited to describe the material. Many similar structural materials have been used with great success representing a wide range of stone-soil ratios, with and without stabilizing materials, but very few have been formally tested with both pavement and plant considerations. Several installations in British Columbia, Canada; Cincinnati, OH; Atlanta Olympic Park; Sydney Australia Olympic Park; and Brisbane, Australia, have demonstrated the viability of the approach in various forms. There have been several less successful and outright failures with conceptually similar installations as well. Of those tested, the Danish Institute of Forest Research and Cornell University Urban Horticulture Institute have reached many of the same conclusions independently. The final result is that many similar but different materials all fall under one conceptual term, structural soil, and not all of them work well.

Given the costs of failure, it is imperative to test any material appropriately with the involvement of the pavement design engineer. Our experience is that the system is more sensitive to pavement needs than to plant needs. As such, the most common miscues in execution of a structural soil system are

excessive soil and the inclusion of organic amendments without proper testing. Without thorough testing to define a compaction level or any control of compaction, installations may, or may not, be structurally sound or horticulturally viable. Without a compaction test during mix design, one cannot know what aeration and root impedance issues lie ahead after installation. Our testing has shown little variation of plant establishment response over a wide mix ratio range. The root zone can be managed with irrigation and nutritional supplements over time, but it is expensive to lose and replace pavement prematurely. It is good planning to err on the side of pavement stability as it can be demonstrated to simultaneously provide a root zone to manage.

The structural soils developed and tested at Cornell University have been patented and are available through licensed distributors of CU Soil® in the United States. The intent has been to allow licensing to companies that can design, test and mix appropriate materials to provide a known product in quantity. CU Soil® distributors will have to provide the compaction data and specification, and CBR testing results of the material for installing contractors, site testing engineers, and landscape architects. The licensees will also have the results of ongoing research into the materials incorporated into their program to accommodate this new and developing methodology. Information on licensing can be obtained from:

Amereq Inc. 19 Squadron Boulevard New York City, NY 10956 (telephone 914-634-2400 or 1-800-832-8788)

## FREQUENTLY ASKED QUESTIONS:

## What happens when the hydrogel breaks down over time?

The hydrogel in the system is used to stabilize the mixture during the mixing, placement, and compaction phases of installation. There is no data on the expected life expectancy of hydrogels in general in structural soil systems under pavement. This situation is much different than more traditional soils and media in which hydrogels have been employed. While testing is needed, we have observed intact hydrogel during excavation of test profiles four years after mixing. What happens when it breaks down? It reverts to the potassium salts and acrlyamides from which it was produced. There will be the potential for soil movement due to vibration, but after the period of time required for loss of hydrogel efficacy, we are hoping to have a stable material, colonized by roots and other organisms which could replace the spatial and tackifying roles of the hydrogel.

## What happens when roots expand in CU Soil?

We have seen roots deform to move around the stone structure, rather than displace the stones. There will come a time where the roots will likely displace the stone structure in the system. If we can move the roots down deep into the profile, the pressure they generate during expansion could be spread over a larger surface at the bottom of the pavement slab. With the appropriate thickness of the base course and pavement, the pressure could be accommodated within the strength of the pavement. There is no data on the radial expansion pressure generated by roots in secondary growth which account for the non- uniform pressure distribution, and plasticity a root can exhibit. We need more information to define a depth of the base material, since models for loading stresses upward on pavement need development.

## Can you add normal soil in the tree pit and CU Soil under the pavement?

This is not necessary and is not recommended. The material is designed to be horticulturally sound, and our research has shown its ability to allow fast establishment. There would be the increase in material and labor costs to excavate and replace material after compaction. By adding the soil, you would produce a soil interface between the CU Soil ® and the backfill. This is definitely not a positive effect, and could be detrimental. Using a structural soil to directly plant in also allows for a firm base for unit pavers close to the root ball.

## Is CU Soil susceptible to frost heave?

This topic has not been rigorously tested. The mix design of CU Soil ® should produce an extremely porous material. The original mix designs were approached in a manner to produce a material deemed low in frost susceptibility by US Army Corps of Engineers Cold Regions Research and Engineering Laboratory publications. We have not formally tested for frost heave potential, nor we have we observed frost heave damage in the several Ithaca, NY installations. The Central Avenue, Cornell Campus installation does accommodate occasional heavy vehicle and emergency traffic at all times during the year. There has been no stability problem to date on the rather thick 8 inch pavement. Based on drainage testing and swell data from compacted laboratory samples, the material appears to be quite stable. Can you use balled-and-burlapped, bare-root, or containerized trees in structural soils?

You can use trees from any production technique in CU Soil ®, and they have been used successfully. What is important is to think about the watering requirements for a newly transplanted tree.

## What are the longest installations of CU Soil, and where are they?

The two oldest installations of hydrogel-stabilized, structural soil materials based on our research, with which we have any experience, were installed in 1994. These two projects were based on our early experimental results. The first one completed was part of the Staten Island Esplinade Project by the Staten Island Coast Guard Barracks. Honeylocust were planted into the structural soil on that project. The second project was for the Central Avenue on the Cornell Campus. London Plane trees were installed on that project. That same year, our first field experiment was under construction. The project was concluded and destroyed in 1997 - 1998. There was no aggregate migration of hydrogel within that 4 - 5 year period. There are numerous installations of various sizes across the United States and Canada. We are slated to be using CU Soil ® on the Boston Tunnel Project.

## Can you add irrigation to structural soils?

Yes, and it would be encouraged for the eventual water demands of a more mature tree. Methods of water delivery are part of our current research. We would optimally have an irrigation/passive aeration system between the pavement base and the CU Soil ® sub-base. Such a system would minimize or nearly eliminate the need for access points in the pavement surface distant from the tree opening in the pavement. This necessitates drainage at the bottom of the CU Soil ® layer to prevent a build-up of moisture in the root zone.

#### Can you store large quantities of CU Soil, or do you have to make it fresh?

It would be preferable to not store the material in large stockpiles. The reality is a necessity to stock

the material if production is to be cost efficient. The danger is a lack of aeration at the center base of a 400 cubic yard stockpile if kept exposed during a wet season such as winter-spring in much of this country. Turning the pile and blending to aerate the pile should overcome this difficulty. If a fertilizing agent is added to the CU Soil ®, consideration to moisture, time, and temperature impact the shelf life of the individual stock pile.

## Should this be used in urban areas without pavement over the root zone?

It would not be cost-effective, nor the best design solution for any application other than supporting a paved surface scheduled to meet pedestrian, maintenance, and possible emergency vehicle traffic, or parking lot applications. Each situation is more-or-less unique, and no single design tool should be used as a broad-based design solution.

## What is the minimum and maximum recommended depth for placing CU Soil?

We would suggest a six-inch base material layer and a minimum eighteen inch thickness of the CU Soil ® layer. Maximum depth of installation has not been tested; however, 36 inches is a reasonable lower limit. The reality is a cost-driven excavation decision process. Often, infrastructure would limit the layer thickness, since there is no desire to encourage working a CU Soil ® installation around pipes, wires, and conduits. We do not know how deep roots will effectively colonize a structural soil profile, but our field experiment visually suggested they would have no problem going deeper than the 24 inch CU Soil ® profile provided in the study.

## What is the minimum recommended length and width for placing CU Soil?

There is no established minimum. One should consider several factors. CU Soil ® was designed to go under the entire pavement section. Utility considerations may influence location of some root zone encouragement. The material under a pavement section is preferably homogenous to prevent differential engineering characteristics below the pavement, particularly in regards to frost movement and drainage. The installation should focus on a whole sidewalk section or even a whole block.

#### Won't the soil migrate down through a structural soil profile after installation?

As mentioned earlier, the excavation of a relatively old installation did not show any aggregate migration. This area of vibratory effects on the system over time is in need of investigation. The hydrogel has an influence on this, hence its use in the design of CU Soil

®. The long-term stability will then be influenced on the hydrogel's effective life within this system. It will also be influenced by the biotic activity within the CU Soil® over time as root growth, as cementatious compounds interact with the soil-stone interface within the CU Soil® bulk system.

## 'CU SOIL'

## STRUCTURAL SOIL

## DESCRIPTION AND SPECIFICATION

This is a compilation of information from the author with input and formatting into specification language from various individuals; most notably Dr. Lynne Irwin for the Cornell Local Roads Program, and James Urban and his staff at Urban and Associates, Annapolis, MD.

This section describes the specification and mixing of a gap-graded material targeted to conform to a GP-GM material as defined by the Unified Soil Classification system with a minimum California Bearing Ratio exceeding 50 when properly compacted.

The intent is to form a two phase system: a rigid, high bearing capacity stone structure and a viable rooting zone for planted material suspended within the voids of the stone structure. This is achieved by mixing an angular stone of known size and shape with a soil predominately passing a #200 sieve. The object is to minimize or eliminate all size fractions between 0.75 inches and medium sand (0.16 inches) as defined by the USDA soil classification system.

The material is designed to function as a sub-base material under pavements for pedestrian traffic or light vehicular traffic with the ability to withstand loading of emergency and/or maintenance vehicles. Its intended purpose is for establishing trees in areas where the tree is totally surrounded by pavement and space limitations or other factors preclude the use of non-paved tree zones or large tree planting containerized areas.

## 1.1 GENERAL

The work of this Section consists of all Structural Soil work and related items as indicated on the Drawings or as specified herein and includes, but is not limited to, the following:

A. CU Soil ®.

## 1.2 REFERENCES AND STANDARDS

- A. The following references are used herein and shall mean:
  - 1. ASTM: American Society of Testing Materials.
  - 2. USDA: United States Department of Agriculture.
  - 3. AASHTO: American Association of State Highway and Transportation Officials.
  - 4. Standard Specifications: Regional or Municipal Standard Specifications Documentation for the location of proposed usage.
  - 5. AOAC: Association of Official Agricultural Chemists

#### 1.3 SAMPLES AND SUBMITTALS

A. At least 30 days prior to ordering materials, the Contractor shall submit to the Engineers representative samples, certificates, manufacturer's literature and certified tests for materials specified below. No materials shall be ordered until the required samples, certificates, manufacturer's literature and test results have been reviewed and approved by the Engineer. Delivered materials shall closely match the approved samples. Approval shall not constitute final

acceptance. The Engineer reserves the right to reject, on or after delivery, any material that does not meet these specifications.

- B. Submit two one half cubic foot representative samples of Clay Loam and two two cubic foot representative samples Structural Soil mixes in this section for testing, analysis and approval. Submit one set of samples for every 500 CY of material to be delivered. In the event of multiple source fields for Clay Loam, submit a minimum of one set of samples per source field or stockpile. Samples shall be taken randomly throughout the field or stockpile at locations as directed by the Engineer and packaged in the presence of the Engineer. Contractor shall deliver all samples to testing laboratories and shall have the test results sent directly to the Engineer. Samples shall be labeled to include the location of the source of the material, the date of the sample and the Contractors name. One of the two samples is to be used by the testing laboratory for testing purposes. The second sample of all Clay Loam and Structural Soil shall be submitted to the Engineer at the same time as test analysis as a record of the soil color and texture.
  - 1. Submit the locations of all source fields for Clay Loam.
  - 2. Submit a list of all chemicals and herbicides applied to the Clay Loam for the last five years and a list of all crops grown in the Clay Loam source fields for the last three years.
- C. Submit soil test analysis reports for each sample of Clay Loam and Structural Soil from an approved soil-testing laboratory. The test results shall report the following:
  - 1. The soil testing laboratory shall be approved by the Engineer. The testing laboratory for particle size and chemical analysis may be a public agricultural extension service agency or agricultural experiment station.
  - 2. Submit a bulk density of the sample and particle size analysis including the following gradient of mineral content:

USDA Designation Size in mm.

Gravel +2mm

Sand 0.05 - 2 mm

Silt 0.0002-0.05 mm

Clay minus 0.002 mm

Sieve analysis shall be performed and compared to USDA Soil Classification System. Sieve analysis shall be done by a combined hydrometer and wet sieving using sodium hexametaphosphate as a dispersant in compliance with ASTM D422 after destruction of organic matter by hydrogen peroxide.

- 3. Submit a chemical analysis, performed in accordance with current AOAC Standards, including the following:
  - a. pH and Buffer pH.
  - b. Percent organic matter as determined by the loss of ignition of oven dried samples. Test samples shall be oven dried to a constant weight at a temperature of 230 degrees F, plus or minus 9 degrees.
  - c. Analysis for nutrient levels by parts per million including nitrate nitrogen, ammonium nitrogen, phosphorus, potassium, magnesium, manganese, iron, zinc, calcium and extractable aluminum. Nutrient test shall include the testing laboratory recommendations for supplemental additions to the soil as calculated by the amount of material to be added per volume of soil for the type of plants to be grown in the soil.

    Analysis for levels of toxic elements and compounds including arsenic, boron, cadmium, chromium, copper, lead mercury, molybdenum, nickel, zinc and PCB. Test results shall
  - d. Soluble salt by electrical conductivity of a 1:2 soil/water sample measured in Millimho per cm.
  - f. Cation Exchange Capacity (CEC).

be cited in milligrams per kilogram

- g. Carbon/Nitrogen Ratio.
- 4. Submit 5-point minimum moisture density curve AASHTO T 99 test results for each Structural Soil sample without removing oversized aggregate.
- 5. Submit California Bearing Ratio test results for each Structural Soil sample compacted to peak standard density. The soaked CBR shall equal or exceed a value of 50.
- 6. Submit measured dry-weight percentage of stone in the mixture.
- 7. The approved Structural Soil samples shall be the standard for each lot of 500 cubic yards of material.
- 8. All testing and analysis shall be at the expense of the Contractor.
- D. Maintenance Instructions: Prior to the time of Final Acceptance of the Work, submit maintenance instructions for the use, removal and replacement of Structural Soil for the licensor's (Amereq Corp.) use. The instructions shall be reviewed by the Project Engineer as a pre-condition for Final Acceptance of the Work.
- E. Submit to the Engineer for review a proposed plan and vertical section layout of all Structural Soil.

- F. Submit one cubic foot sample per each 500 cubic yards of required material, and for each sample, the following analysis for all Crushed Stone. The soil testing laboratory shall be approved by the Engineer.
  - 1. Provide a particle size analysis including the following gradient of mineral content:

USDA D	esignation)	n		Size in mm.
3@				+76mm
2-1/2@				63-76mm
2@				50-63mm
1-1/2@				37-50mm
1@				25-37mm
3/4@				19-25mm
	r.	1	2.10	0 1 0 0 7

Fine gravel 2-19mm Sand 0.05-2

mm

Silt 0.002-0.05 mm

Clay minus 0.002 mm

- 2. Provide the manufacturers analysis of the following:
  - a. Loose and rodded unit weight.
  - b. Bulk specific gravity and absorbency.
  - c. Stone dimension and surface texture description.
  - d. Documentation of acceptance for use as DOT approved aggregate by the appropriate regional DOT.
- Provide a percent pore space analysis defined as follows:
   (1-Rodded Unit Weight divided by the Bulk Specific Gravity )X 100
- G. Submit one pound sample of each type of fertilizer and 3 certificates showing composition and analysis. Submit the purchasing receipt for each fertilizer showing the total quantity purchased for the project prior to installation.
- H. Submit the Landscape or Pavement Material Contractor's qualifications outlining

projects of similar quality, schedule requirements and construction detailing over the last 5 years. Qualifications shall include: The names of all similar projects, year completed, location, description of the scope of work including the types and quantities of planting mix / pavement material installed and the name, address and telephone number of the owner or the owner's representative.

# 1.4 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver or place soils in frozen, wet, or muddy conditions. Material shall be delivered at or near optimum compaction moisture content as determined by AASHTO T 99 (ASTM D 698). Do not deliver or place materials in an excessively moist condition (beyond 2 percent above optimum compaction moisture content as determined by AASHTO T 99 (ASTM D 698).
  - B. Protect soils and mixes from absorbing excess water and from erosion at all times. Do not store materials unprotected from large rainfall events. Do not allow excess water to enter site prior to compaction. If water is introduced into the material after grading, allow material to drain or aerate to optimum compaction moisture content.

## 1.5 EXAMINATION OF CONDITIONS

- A. All areas to receive Structural Soil shall be inspected by the Contractor before starting work and all defects such as incorrect grading, compaction and inadequate drainage etc. shall be reported to the Engineer prior to beginning this work.
- B. The Contractor shall be responsible for judging the full extent of work requirements involved, including but not limited to the potential need for temporary storage and staging of soils, including moving soil stock piles at the site to accommodate scheduling of other work and the need to protect installed soils from compaction, erosion and contamination.

## 1.6 QUALITY ASSURANCE

A. Qualifications of Landscape or Pavement Material Contractor: The work of this section shall be performed by a Landscape Contracting firm which has a minimum of 5 years experience successfully installing planting mix of a similar quality, schedule requirement and construction detailing to this project. Proof of this experience shall be submitted as per paragraph, SAMPLES AND SUBMITTALS, of this Section.

## **MATERIALS**

#### 2.1 CLAY LOAM

A. Clay Loam shall be a "loam" based on the "USDA classification system" as determined by mechanical analysis (ASTM D-422) and it shall be of uniform composition, without admixture of subsoil. It shall be free of stones greater than one-half inch, lumps, plants and their roots, debris and other extraneous matter over one inch in diameter or excess of smaller pieces of the same materials as determined by the Engineer.

It shall not contain toxic substances harmful to plant growth. It shall be obtained from naturally well-drained areas, which have never been stripped of top soil before and have a history of satisfactory vegetative growth. Clay Loam shall contain not less than 2% nor more than 5% organic matter as determined by the loss on ignition of oven-dried samples. Test samples shall be oven-dried to a constant weight at a temperature of 230 degrees F., plus or minus 9 degrees.

B. Mechanical analysis for a Loam / Clay Loam shall be as follows:

Textural Class % of total weight
Gravel less than 5%
Sand 20 - 45%
Silt 20 - 50%
Clay 20- 40%

- C. Chemical analysis: Meet or be amended to meet the following criteria.
  - 1. pH between 5.5 to 6.5
  - 2. Percent organic matter 2 5% by dry weight.
  - 3. Nutrient levels as required by the testing laboratory recommendations for the type of plants to be grown in the soil.
  - 4. Toxic elements and compounds below the United States Environmental Protection Agency Standards for Exceptional Quality sludge or local standard; whichever is more stringent.
  - 5. Soluble salt less than 1.0 Millimho per cm.
  - 6. Cation Exchange Capacity (CEC) greater than 10
  - 7. Carbon/Nitrogen Ratio less than 33:1.
- D. Clay Loam shall be the product of a commercial processing facility specializing in

production of stripped natural topsoil. No topsoil shall come from USDA - classified prime farmland.

#### 2.2 FERTILIZER

- A. Commercial fertilizer complying with State and United States fertilizer laws. Deliver fertilizer in original unopened containers, which shall bear the manufacturer's certificate of compliance covering analysis, which shall be furnished to the Engineer. Fertilizer shall be formulated for mixing into the soil and be certified by the manufacturer to provide controlled release of nitrogen continuously for a period of no less than 9 months and no more than 12 months.
- B. Fertilizer percentages of weight of ingredients and application rates shall be as recommended by the soil testing results.

## 2.3 SULFUR (if needed)

- A. Sulfur shall be commercial granular, 96% pure sulfur, delivered in containers with the name of the manufacturer, material and analysis appearing in the container.
- B. Sulfur used to lower soil pH above 6.5 shall be ferrous sulfate formulation.

## 2.4 LIME (if needed)

A. Agricultural limestone containing a minimum of 85% carbonates. Minimum gradation: 100% passing 10 mesh sieve; 98% passing 20 mesh sieve; 55% passing 60 mesh sieve and 40% passing 100 mesh sieve.

#### 2.5 CRUSHED STONE

- A. Crushed Stone shall be a DOT certified crushed stone. Granite and limestone have been successfully used in this application. Ninety-100 percent of the stone should pass the 1.5 inch sieve, 20-55 percent should pass the 1.0 inch sieve and 10 percent should pass the 0.75 inch sieve. A ratio of nominal maximum to nominal minimum particle size of 2 is required.
- B. Acceptable aggregate dimensions will not exceed 2.5:1.0 for any two dimensions chosen.
- C. Minimum 90 percent with one fractured face, minimum 75 percent with two or more fractured faces.

- D. Results of Aggregate Soundness Loss test shall not exceed 18 percent.
- E. Losses from LA Abrasion tests shall not exceed 40%.

#### 2.6 HYDROGEL

A. Hydrogel shall be a potassium propenoate-propenamide copolymer Hydrogel as manufactured by Gelscape by Amereq Corporation. (800) 832-8788

## 2.7 WATER

A. The Contractor shall be responsible to furnish his own supply of water to the site at no extra cost. All work injured or damaged due to the lack of water, or the use of too much water, shall be the Contractor's responsibility to correct. Water shall be free from impurities injurious to vegetation.

#### 2.8 STRUCTURAL SOIL

A. A uniformly blended mixture of Crushed Stone, Clay Loam and Hydrogel, mixed to the following proportion:

MATERIAL UNIT OF WEIGHT

Crushed Stone 100 units dry weight

Loam As determined by the test of the mix (Approx. 20 units)

Hydrogel 0.03 units dry weight

Total moisture AASHTO T-99 optimum moisture)

B. The initial mix design for testing shall be determined by adjusting the ratio between the Crushed Stone and the Clay loam (see Appendices I and II). Adjust final mix dry weight mixing proportion to decrease soil in mixture if CBR test results fail to meet acceptance (CBR # 50).

## **CONSTRUCTION METHODS**

# 3.1 MIX DESIGN

A. Prepare sample Structural Soil mixes to determine the ratio of mix components. Submit for approval.

- 1. Submit samples and the test results of each mix component for approval. Based on samples and the analysis of the mix components, the Engineer and the Contractor will jointly determine a mix ratio to be tested for conformance with the requirements of the specifications. For Structural Soil quantities greater than 500 cubic yards, test the mix ratio for each Clay Loam or Crushed Stone where the testing indicates a significant difference in physical analysis of the Clay Loam or Crushed Stone as determined by the Engineer.
- 2. The Contractor shall prepare the samples of the proposed mix ratio options and obtain soil test as described in paragraph 1.04. C. Submit the samples of each of the mixes with the test results.
- 3. The Engineer may request additional Structural Soil mix ratio samples to be tested in the event that further refinement of the mix is necessary.
- 4. Submit to the Engineer proposed fertility amendment recommendations including amounts and types of fertilizers and pH adjustments for each mix ratio. Fertility adjustments shall be included as part of the mixing process.

## 3.2 SOIL MIXING AND QUALITY CONTROL TESTING

- A. All Structural Soil mixing shall be performed at the Contractor's yard using appropriate soil measuring, mixing and shredding equipment of sufficient capacity and capability to assure proper quality control and consistent mix ratios. No mixing of Structural Soil at the project site shall be permitted. Portable pugging may be used.
  - 1. Maintain adequate moisture content during the mixing process. Soils and mix components shall easily shred and break down without clumping. Soil clods shall easily break down into a fine crumbly texture. Soils shall not be overly wet or dry. The contractor shall measure and monitor the amount of soil moisture at the mixing site periodically during the mixing process.
  - 2. A Mixing procedure for front-end loader shall be as follows:
    - a. On a flat asphalt or concrete paved surface, spread an 8 inch to 12 inch layer of crushed stone.
    - b. Spread evenly over the stone the specified amount of dry hydrogel.
    - c. Spread over the dry hydrogel and crushed stone a proportional amount of clay loam according to the mix design.
    - d. Blend the entire amount by turning, using a front-end loader or other

suitable equipment until a consistent blend is produced.

- e. Add moisture gradually and evenly during the blending and turning operation as required to achieve the required moisture content. Delay applications of moisture for 10 minutes prior to successive applications. Once established, mixing should produce a material within 1% of the optimum moisture level for compaction.
- 3. A pugging operation mixing procedure may be as follows:
  - a. Feed a known weight of crushed stone into the mixing trough.
  - b. Add hydrogel as a slurry into trough and mix slurry and stone into a uniform blend.
  - c. Meter in soil in proper proportion of Clay loam Soil. While stoneslurry mixture is in motion.
  - d. Add water to bring mixture to target moisture content after factoring in water from the slurry and the Clay-loam moisture.
  - e. Auger out to stock pile or transport vehicle (or into pit if using a portable pugging operation).
- 4. Add soil amendments to alter soil fertility including fertilizers and pH adjustment at the time of mixing at the rates recommended by the soil test.
  - a. Soil pH shall be adjusted to fall within a value of 5.5 and 6.5 two months after mixing if the material is stored, unless mixing with a high pH stone. Once pavement is laid, no adjustment should be imposed.
  - b. Soil component Carbon / nitrogen ratio shall be adjusted to be less than 33:1 within two months after mixing.
- B. The Contractor shall mix sufficient material in advance of the time needed at the job site to allow adequate time for final quality control testing as required by the progress of the work. Structural Soil shall be stored in piles of approximately 500 cubic yards and each pile shall be numbered for identification and quality control purposes. Storage piles shall be protected from rain and erosion by covering with plastic sheeting.
- C. During the mixing process, the Contractor shall take two one cubic foot quality control samples per 500 cubic yards of production from the final Structural Soil. The samples shall be taken from random locations in the numbered stockpiles as required by paragraph 1.03.B of this specification. Each sample shall be tested for particle size analysis and chemical analysis as described in Paragraph 1.03. C.2 and 3 above. Submit the results directly to the Engineer for review and approval.
- D. The quality control sample Clay Loam-Crushed Stone ratio's shall be no greater or less than 2% of the approved test sample as determined by splitting a known weight of oven dried material on a #4 sieve. In the event that the quality control samples vary significantly from the approved Structural Soil sample, as determined by the Engineer, remix and retest any lot of soil that fails to meet the correct analysis making adjustments to the mixing ratios and procedures to achieve the approved consistency.

#### 3.3 UNDERGROUND UTILITIES AND SUBSURFACE CONDITIONS

- A. Notify the Engineer of any subsurface conditions which will affect the Contractor's ability to complete the work.
- B. Locate and confirm the location of all underground utility lines and structures prior to the start of any excavation.
- C. Repair any underground utilities or foundations damaged by the Contractor during the progress of this work. The cost of all repairs shall be at the Contractor's expense.

## 3.4 SITE PREPARATION

- A. Do not proceed with the installation of the Structural Soil material until all walls, curb footings and utility work in the area have been installed. For site elements dependent on Structural Soil for foundation support, postpone installation until immediately after the installation of Structural Soil.
- B. Install subsurface drain lines as shown on the Drawings prior to installation of Structural Soil material.
- C. Excavate and compact the proposed sub-grade to depths, slopes and widths as shown on the Drawings. Maintain all required angles of repose of the adjacent materials as shown on the drawings. Do not over excavate compacted sub-grades of adjacent pavement or structures.
- D. Confirm that the sub-grade is at the proper elevation and compacted as required. Sub-grade elevations shall slope parallel to the finished grade and or toward the subsurface drain lines as shown on the drawings.
- E. Clear the excavation of all construction debris, trash, rubble and any foreign material. In the event that fuels, oils, concrete washout silts or other material harmful to plants have been spilled into the sub-grade material, excavate the soil sufficiently to remove the harmful material. Fill any over excavation with approved fill and compact to the required sub-grade compaction.
- F. Do not proceed with the installation of Structural Soil until all utility work in the area has been installed. All subsurface drainage systems shall be operational prior to installation of Structural Soils.

- G. Protect adjacent walls, walks and utilities from damage or staining by the soil. Use 1/2" plywood and or plastic sheeting as directed to cover existing concrete, metal and masonry work and other items as directed during the progress of the work.
  - 1. Clean up all trash and any soil or dirt spilled on any paved surface at the end of each working day.
  - 2. Any damage to the paving or architectural work caused by the soils installation Contractor shall be repaired by the general Contractor at the soils installation Contractor's expense.
- H. Maintain all silt and sediment control devices required by applicable regulations. Provide adequate methods to assure that trucks and other equipment do not track soil from the site onto adjacent property and the public right of way.

#### 3.5 INSTALLATION OF STRUCTURAL SOIL MATERIAL

- A. Install Structural Soil in 6 inch lifts and compact each lift.
- B. Compact all materials to peak dry density from a standard AASHTO compaction curve (AASHTO T 99). No compaction shall occur when moisture content exceeds maximum as listed herein. Delay compaction 24 hours if moisture content exceeds maximum allowable and protect Structural Soil during delays in compaction with plastic or plywood as directed by the Engineer.
- C. Bring Structural Soils to finished grades as shown on the Drawings. Immediately protect the Structural Soil material from contamination by toxic materials, trash, debris, water containing cement, clay, silt or materials that will alter the particle size distribution of the mix with plastic or plywood as directed by the Engineer.
- D. The Engineer may periodically check the material being delivered and installed at the site for color and texture consistency with the approved sample provided by the Contractor as part of the submittal for Structural Soil. In the event that the installed material varies significantly from the approved sample, the Engineer may request that the Contractor test the installed Structural Soil. Any soil which varies significantly from the approved testing results, as determined by the Engineer, shall be removed and new Structural Soil installed that meets these specifications.

#### 3.6 FINE GRADING

- A. After the initial placement and rough grading of the Structural Soil but prior to the start of fine grading, the Contractor shall request review of the rough grading by the Engineer. The Contractor shall set sufficient grade stakes for checking the finished grades.
- B. Adjust the finish grades to meet field conditions as directed.
  - 1. Provide smooth transitions between slopes of different gradients and direction.
  - 2. Fill all dips and remove any bumps in the overall plane of the slope.
    - a. The tolerance for dips and bumps in Structural Soil areas shall be a 3" deviation from the plane in 10'.
  - 3. All fine grading shall be inspected and approved by the Engineer prior to the installation of other items to be placed on the Structural Soil.
- C. The Engineer will inspect the work upon the request of the Contractor. Request for inspection shall be received by the Engineer at least 10 days before the anticipated date of inspection.

## 3.7 ACCEPTANCE STANDARDS

A. The Engineer will inspect the work upon the request of the Contractor. Request for inspection shall be received by the Engineer at least 10 days before the anticipated date of inspection.

### 3.8 CLEAN-UP

A. Upon completion of the Structural Soil installation operations, clean areas within the contract limits. Remove all excess fills, soils and mix stockpiles and legally dispose of all waste materials, trash and debris. Remove all tools and equipment and provide a clean, clear site. Sweep, do not wash, all paving and other exposed surfaces of dirt and mud until the paving has been installed over the Structural Soil material. Do no washing until finished materials covering Structural Soil material are in place.

## References

Asakawa, Bruce and Sharon. California Gardeners Guide. Franklin, Tennessee: Cool Springs Press. 2000.

City of Palo Alto. *Tree Technical Manual*. Palo Alto, California: City of Palo Alto Department of Planning and Community Environment, June, 2001.

Costello, L.R. and Jones, K.S. WUCOLS, Water Use Classification of Landscape Plants. San Francisco and San Mateo County Offices, California: University of California Cooperative Extension, 1994.

Costello, L.R. Training Young Trees for Structure and Form. Arborist News, April 2001.

Graboskym, Jason; Bassuk, Nina and Trowbridge, Peter . LATIS, Structural Soils. Washington, DC. American Society of Landscape Architects, 1999.

Kempf, Brian. Nursery Stock Specifications. Visalia, California: Urban Tree Foundation.

Perry, Bob. Landscape Plants for Western Regions. Claremont, California: Land Design Publishing, 1992.

Sunset Books and Magazines. Western Garden Book. Menlo Park, California: Lane Publishing Co., 1988.

Sutliff, Dale. How to Find a Plant When You Need One. San Luis Obispo, California: California Polytechnic State University, 1977.

The Tree People. Smart Planting for the New Urban Forest. Beverly Hills, California: LA Department of Water and Power, 1992.

Urban Trees Design Group. Green Streets, A Report to the City of Oakland. Oakland, California: Fern Tiger Associates, 1981.

## **WWW Sites:**

http://www.hort.cornell.edu/uhi/outreach/csc/article.html, Urban Horticultural Institute, Cornell University, Ithaca, NY.

http://selectree.cagr.calpoly.edu/, WWW Site Prepared by California Polytechnic State University, San Luis Obispo, California.

http://www.ipm.iastate.edu/ipm/hortnews/1995/3-24-1995/prunit.html, WWW Site Prepared by Jeff Iles, Iowa State University, Department of Horticulture, updated 1/5/98.

http://www2.champaign.isa-arbor.com/consumer/young.html, WWW Site Prepared by International Society of Arboriculture (ISA), updated February 2000.

http://aggie-horticulture.tamu.edu/extension/pruning/pruning.html, Douglas F. Welsh, Ever- ett Janne, Zerle L. Carpenter, Tammy Kohlleppel and Dan Lineberger. WWW Site Prepared by Texas A&M University, Texas Agricultural Extension Service.

http://www.arborday.org/trees/NineNum3.html, WWW Site Prepared by The National Arbor Day Foundation, Lincoln, Nebraska.

http://www.chesco.com/~treeman/train.html, WWW Site Prepared by John A. Keslick Jr., Tree Biologist, Tree Anatomist & Professional Arborist, 1997.